

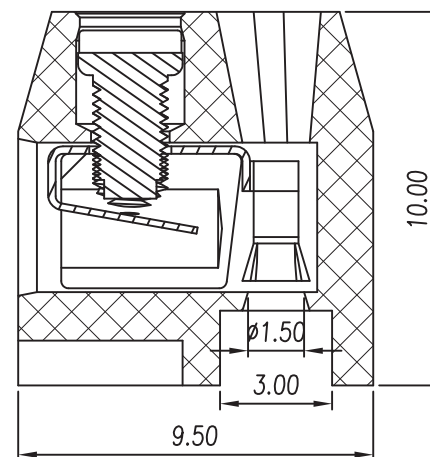


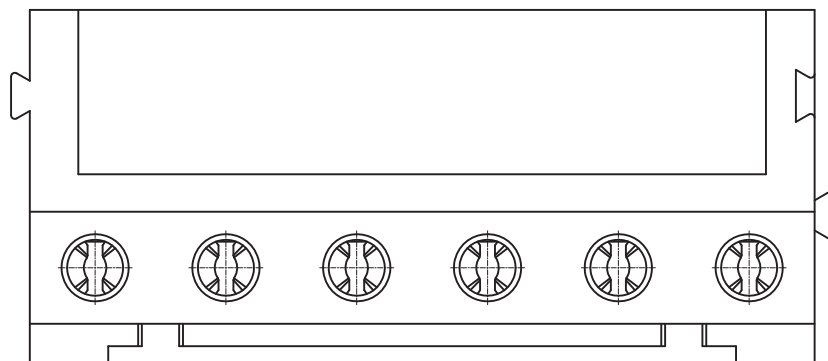

SECTION:A-A

Approvals

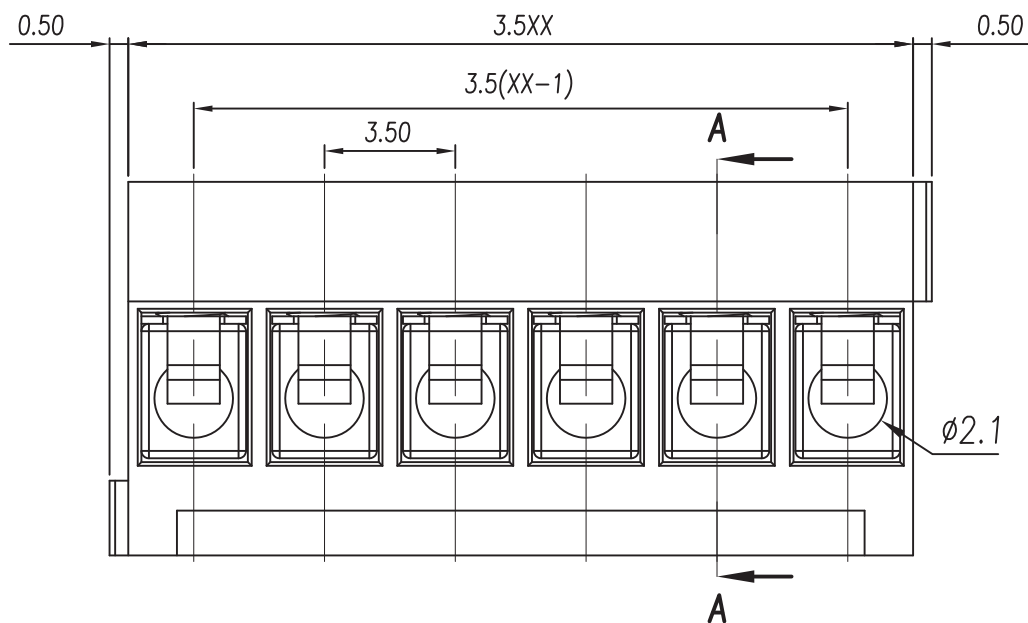

not approved



not approved

Electrical

Rated voltage	250V
Rated current	8A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1 min
Wire range	28-16 AWG 1mm ²

Torque	0,2Nm (1.7 Lb In)
Temp. Range	-40°C + 105°C
Stripping length	5 mm
Max sold. time	

Dimensions

Pitch	3,5 mm
Poles	2÷24

Material

Housing	PA66 UL94 V0
Pin	
Cage	Copper Alloy, Ni plated
Screws	M2 Steel, Zn plated
Side Block	
Nut screw	
Clamp	Copper Alloy, Sn plated

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CLF	02÷24	-3.5			

Version Date

18/01	08/01/18
-------	----------



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CLF-3.5