




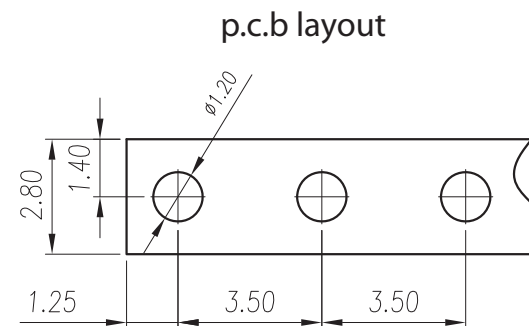

Approvals

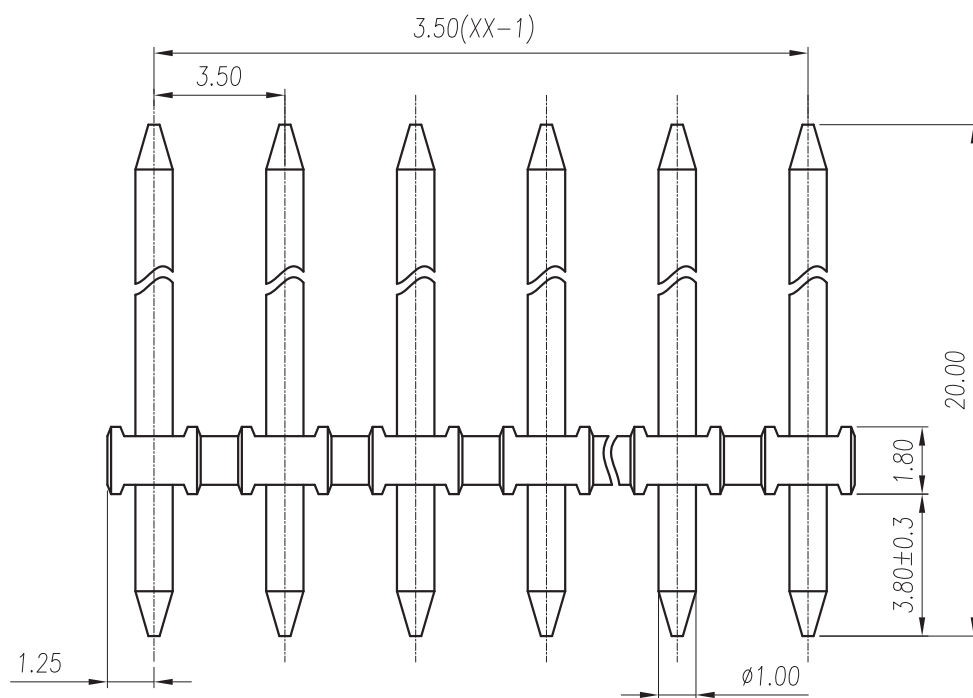

not approved

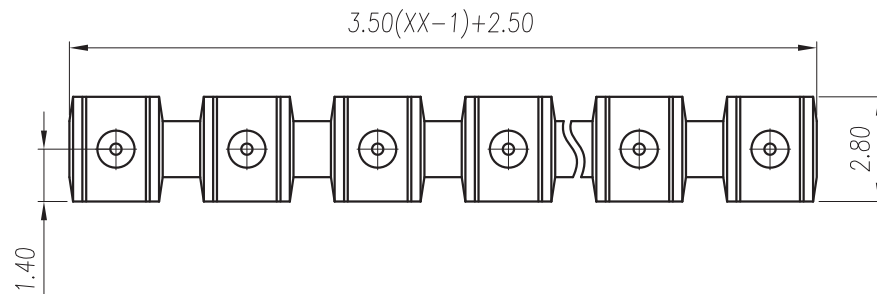

not approved

Electrical

Rated voltage	250V
Rated current	8A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V/1 min
Wire range	

Torque	
Temp. Range	-40°C + 120°C
Stripping length	
Max sold. time	+250°C for 5 sec

Dimensions

Pitch	3,5 mm
Poles	2÷24

Material

Housing	PBT UL94 V0
Pin	Copper Alloy, Sn plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CLM	02÷24	-3.5	-L		

Version Date

19/01	15/07/19
-------	----------



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CLM-3.5-L