



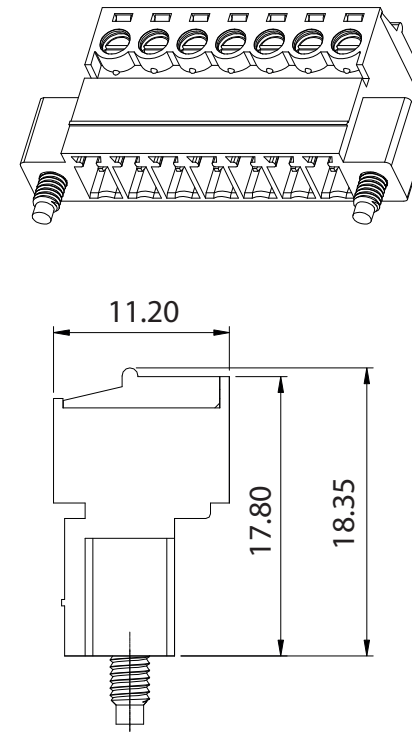

Approvals

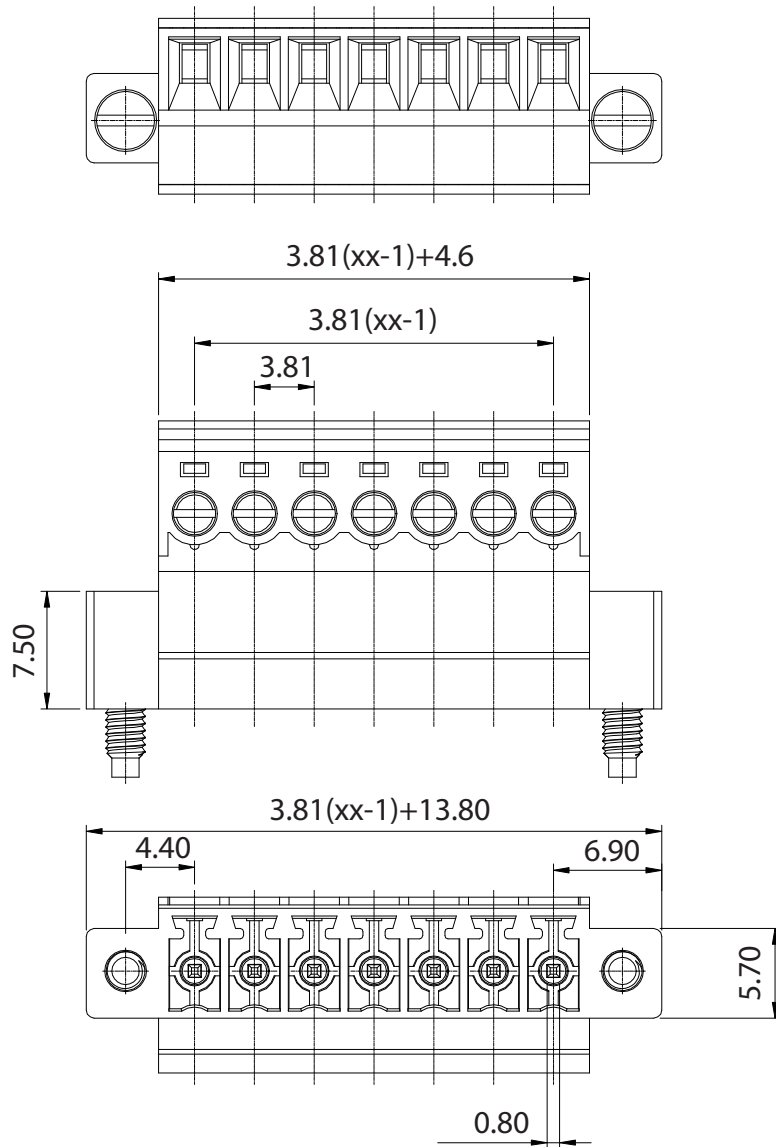

8A - 300V

Electrical

Rated voltage	300V
Rated current	8A
Contact resistance	20Ω
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V/1 min
Wire range	1,5mm ² 28÷16 AWG

Torque	0,2Nm (1,8 Lb in)
Temp. Range	-40°C + 105°C
Stripping lenght	6 mm
Max sold. time	

Dimensions

Pitch	3,81mm
Poles	2÷22

Material

Housing	PA66 UL94V0
Pin	Brass, Ni plated
Cage	
Screws	M2, Steel, Zn plated
Side Block	
Nut screw	
Clamp	Brass, Ni plated

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CRS	02÷24	-3.81	-F		

Version Date

01/22

22/09/22



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 2:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projec on

CRS-3.81-F