


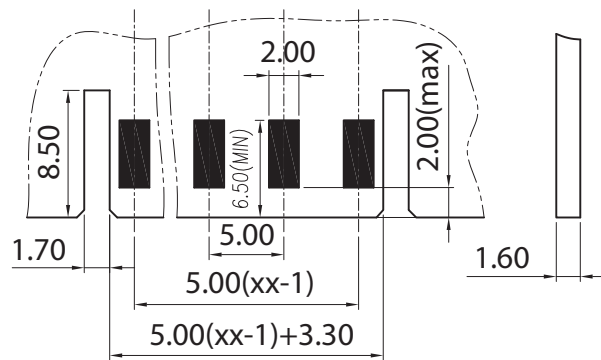


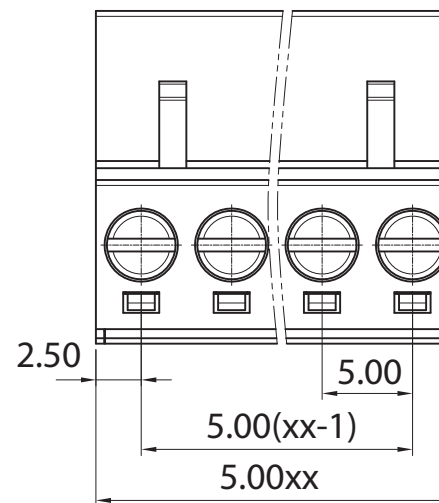

p.c.b. layout

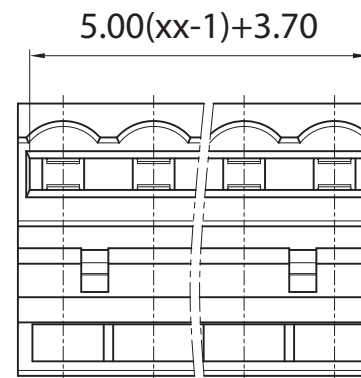

Approvals

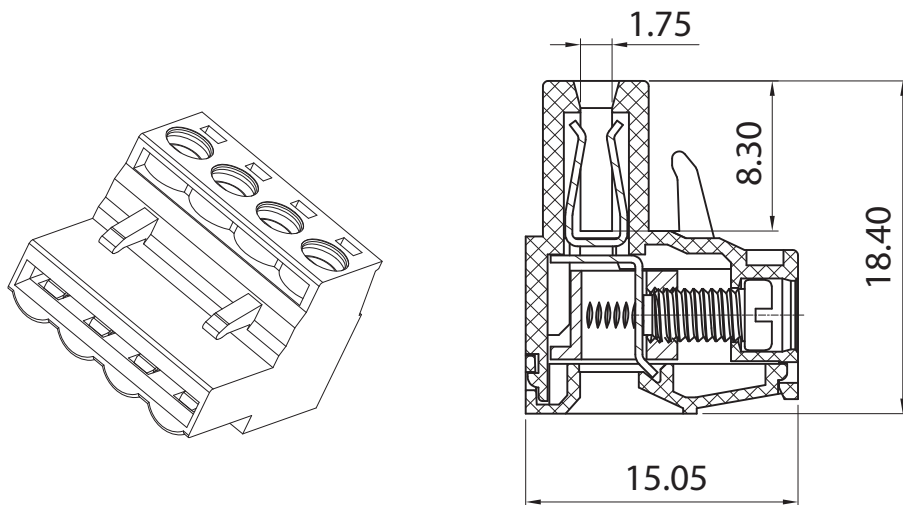

10A - 300V
not approved

Electrical

Rated voltage 320 V
Rated current 17,5 A
Contact resistance 20Ω
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC1600V/1 min
Wire range 2,5mm2 28÷14 AWG

Torque 0,5Nm(4.5Lb in)
Temp. Range -40°C + 105°C
Stripping lenght 7 mm
Max sold. time +250°C for 5 sec.

Dimensions

Pitch 5.00 mm
Poles 2÷24

Material

Housing PA66 UL94V0
Pin ---
Cage Copper Alloy, Ni plated
Screws M3; steel. Zn plated
Side Block ---
Nut screw ---
Clamp Phosphore bronze, Ni plated

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CRSI	2÷24	-5			

Version Date

2021/01 05/02/2021



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 2:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CRSI-5