

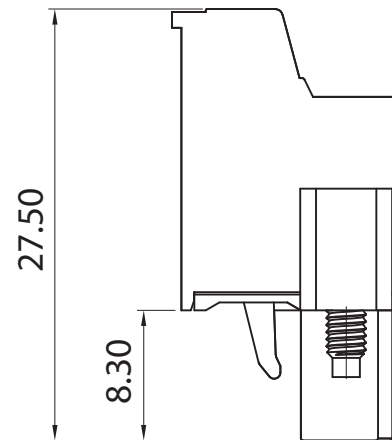


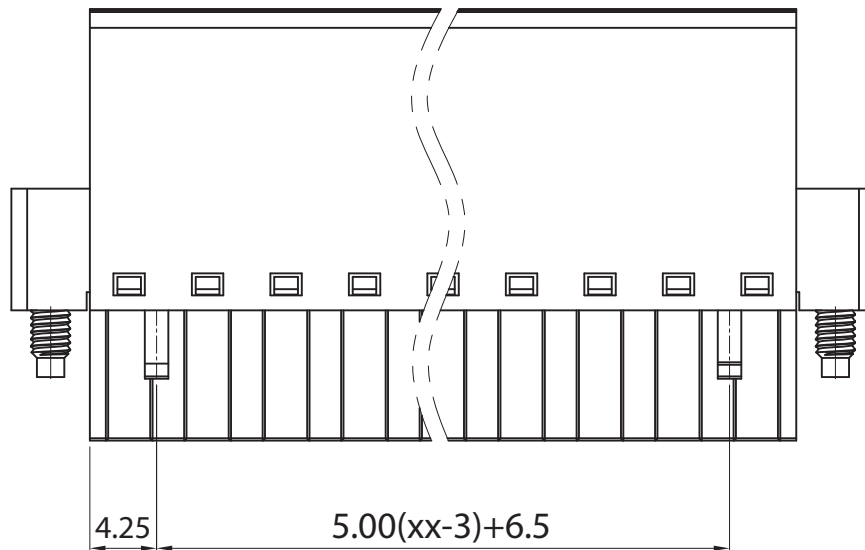

Approvals

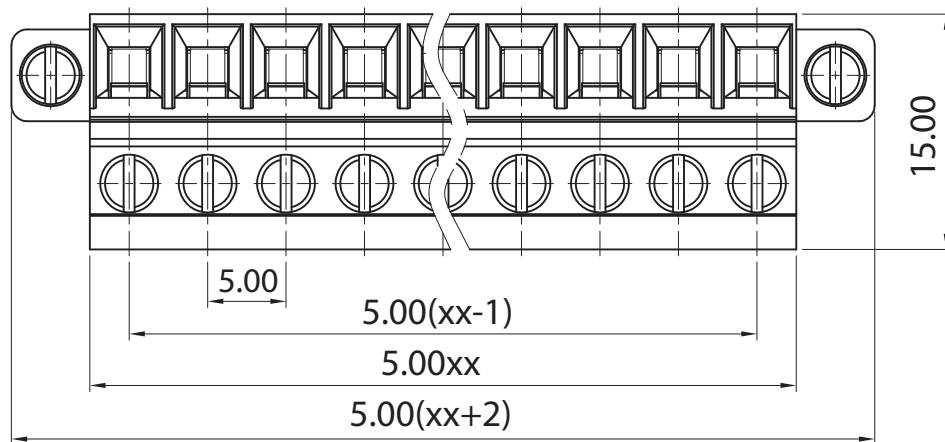

15A - 300V
not approved

Electrical

Rated voltage 450V
Rated current 20A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC1600V/1min
Wire range 28-12 AWG 2,5mm²

Torque
Temp. Range -40°C +105°C
Stripping length 7 mm
Max sold. time

Dimensions

Pitch 5 mm
Poles 2÷24

Material

Housing PA66 UL94V0
Pin
Cage Copper Alloy, Ni plated
Screws
Side Block
Nut screw
Clamp

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFF	02÷24	-5	-F		

Version Date

01/21 08/10/2021



euro-block




linear dimension (Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

—	∕	⊥
to 10	over 10 to 100	over 100 to
0.10	0.30	0.60

UNITS: mm

SCALE: 10:1

SHEET SIZE: ISO A4



First angle projection

CFF-5-F