




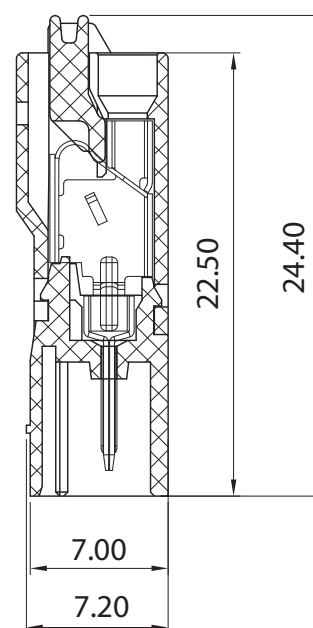

Approvals

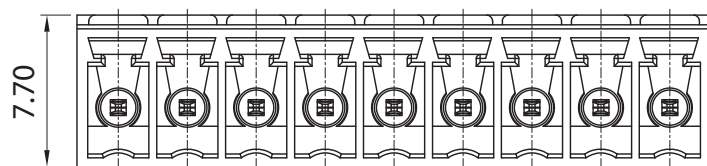

not approved

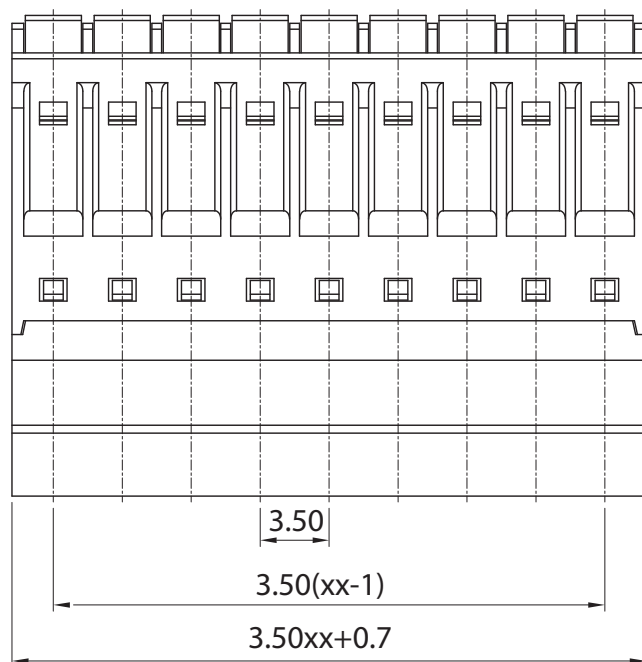

not approved

Electrical

Rated voltage	300V
Rated current	8A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V/1 min
Wire range	24-16 AWG 1,5mm ²

Torque	
Temp. Range	-40°C+105°C
Stripping lenght	9mm
Max sold. time	

Dimensions

Pitch	3,5mm
Poles	2÷24

Material

Housing	PA66UL94V0
Pin	Copper Alloy, Sn plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	Steel

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFC	02÷24	-3.5			


Version	Date
01/21	28/09/2021



euro-block



linear dimension (Tolerances Standard GB/T 14486-2008)										UNITS: mm
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100	over 100 to
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30	0.60
										SCALE: 10:1
										SHEET SIZE: ISO A4



First angle projection

CFC-3.5