
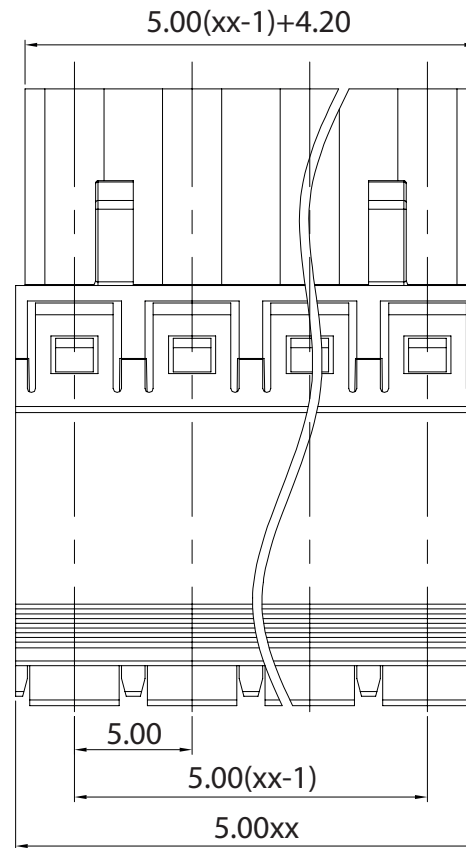
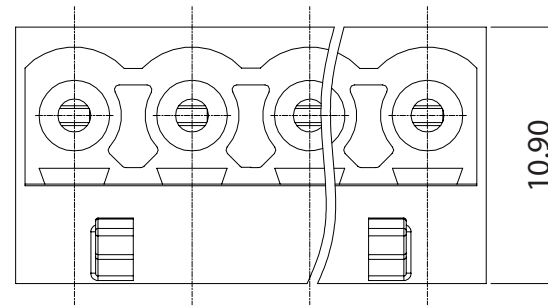


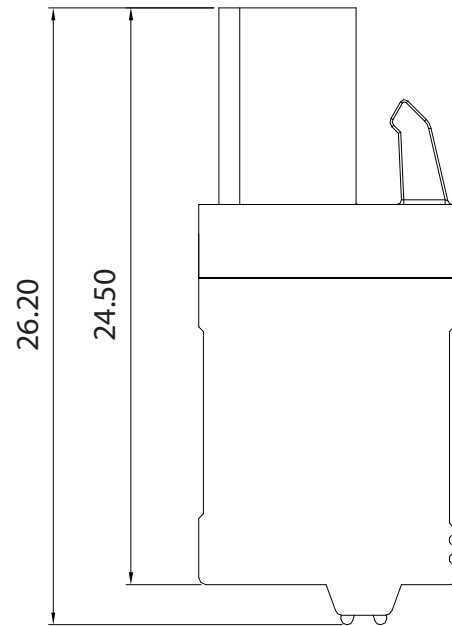

## Approvals

## Electrical

|                       |                              |
|-----------------------|------------------------------|
| Rated voltage         | 320 V                        |
| Rated current         | 12 A                         |
| Contact resistance    | 20mΩ                         |
| Insulation resistance | 500MΩ/DC500V                 |
| Withstanding voltage  | AC1600V/1 min                |
| Wire range            | 2,5mm <sup>2</sup> 24÷16 AWG |

|                  |               |
|------------------|---------------|
| Torque           |               |
| Temp. Range      | -40°C + 105°C |
| Stripping length | 11 mm         |
| Max sold. time   |               |

## Dimensions

|       |         |
|-------|---------|
| Pitch | 5,00 mm |
| Poles | 2-24    |

## Material

|            |                        |
|------------|------------------------|
| Housing    | PA66 UL94V0            |
| Pin        |                        |
| Cage       | Copper Alloy, Snplated |
| Screws     |                        |
| Side Block |                        |
| Nut screw  |                        |
| Clamp      |                        |

## General description of ordering code

| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| CFSC   | 2÷24     | -5    |         |       |        |

Version Date

01/23

06/03/23



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 2:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

**CFSC-5**