

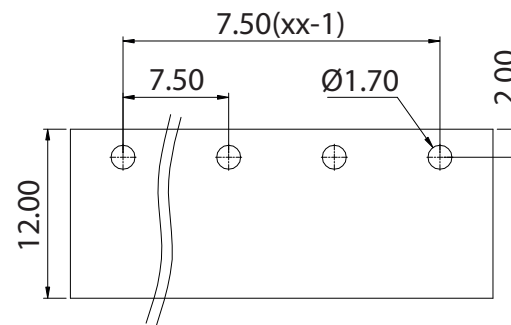
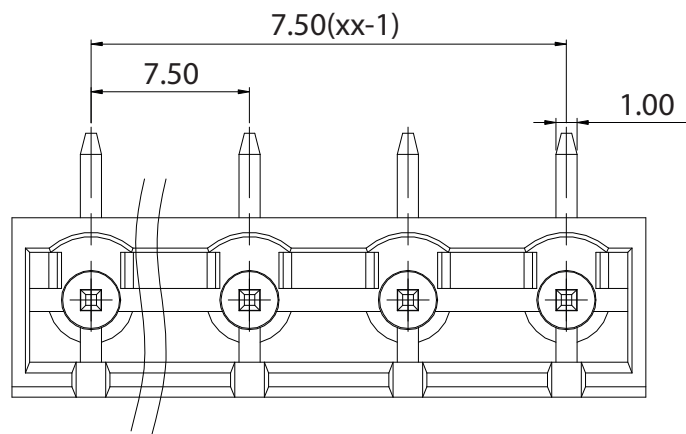


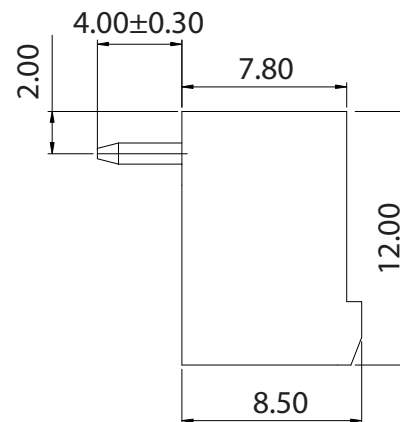

p.c.b. layout

Approvals

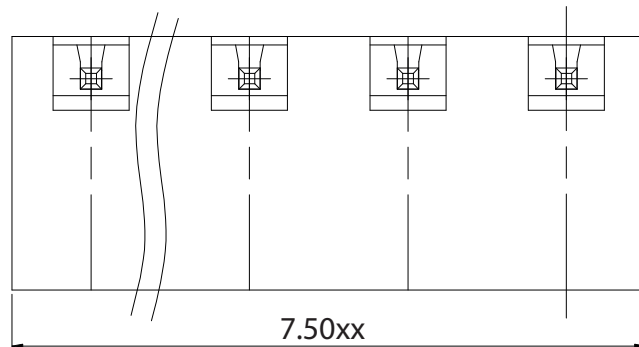

15A-300V



15A-630V

Electrical

Rated voltage	450V
Rated current	20A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1min
Wire range	

Torque	
Temp. Range	-40°C +105°C
Stripping length	
Max sold. time	+250°C for 5 sec

Dimensions

Pitch	7,5mm
Poles	2÷24

Material

Housing	PA66 UL94V0
Pin	Copper Alloy, Sn plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CCM	02÷24	-7.5	-CH		

Version	Date
01/23	05/07/23



euro-block




linear dimension (Tolerances Standard GB/T 14486-2008)									
variable range	to 6	over 6 to 10	over 10 to 30	over 30 to 60	over 60 to 100	over 100 to 160	over 160 to	to 10	over 10 to 100
tolerance	±0.20	±0.30	±0.50	±0.70	±1.00	±1.30	±1.60	0.10	0.30

—	∕	⊥
to 10	over 10 to 100	over 100 to
0.10	0.30	0.60

UNITS: mm

SCALE: 10:1

SHEET SIZE: ISO A4



First angle projection

CCM-7.5-CH