


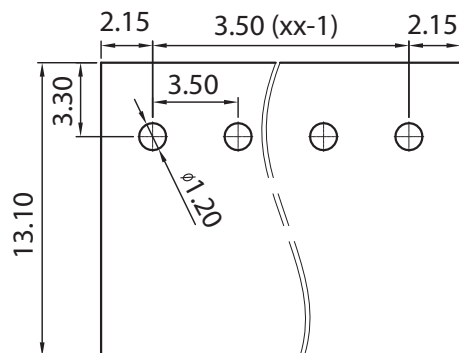
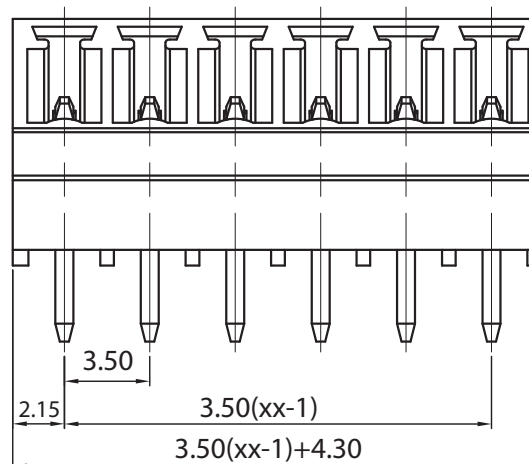


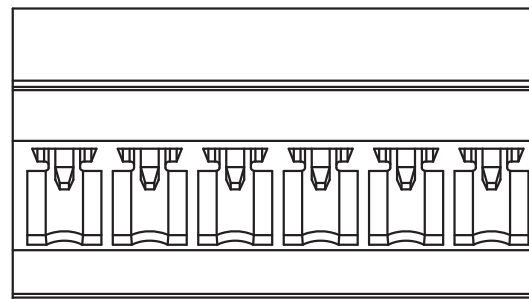

p.c.b. layout

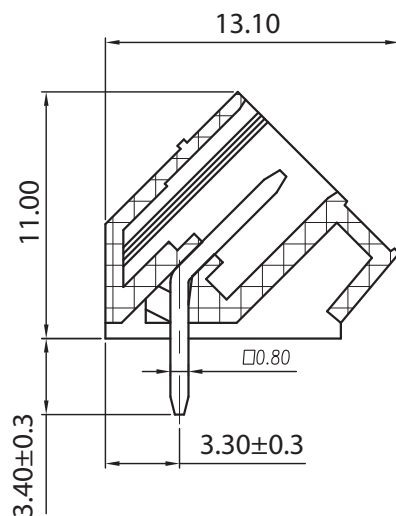

Approvals

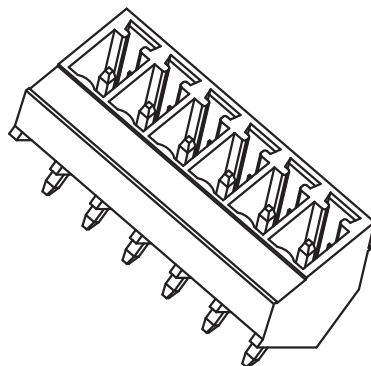

Electrical

Rated voltage	250V
Rated current	12A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1 Min
Wire range	28÷14AWG 2,5mm ²

Torque	
Temp. Range	-40°C+105°C
Stripping lenght	
Max sold. time	+250°C for 5 sec

Dimensions

Pitch	3,5 mm
Poles	2÷24

Material

Housing	PA66 UL94V0
Pin	Copper Alloy, Snplated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CMI	2÷24	-3.5			

Version Date

2020/01	17/03/2020
---------	------------



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CMI-3.5