
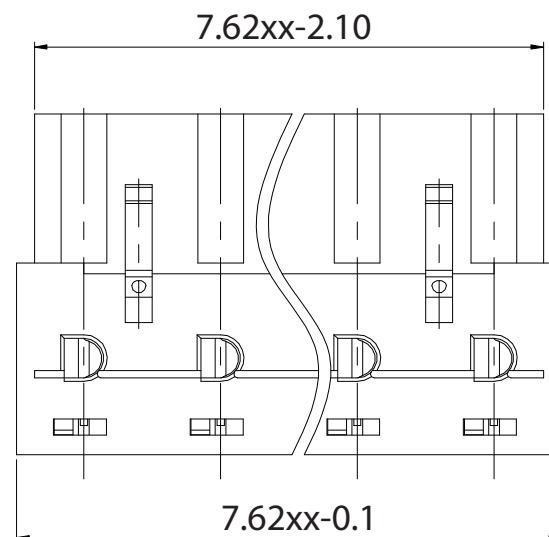
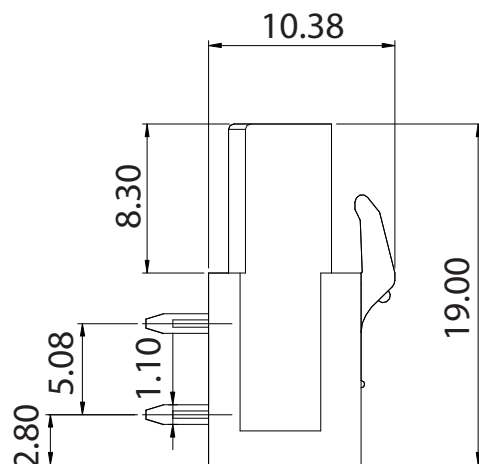
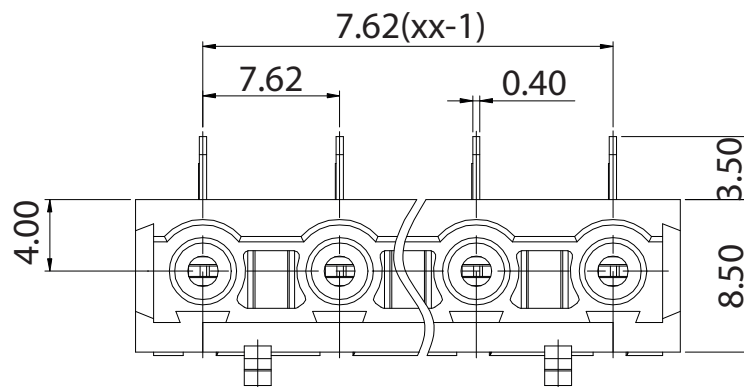


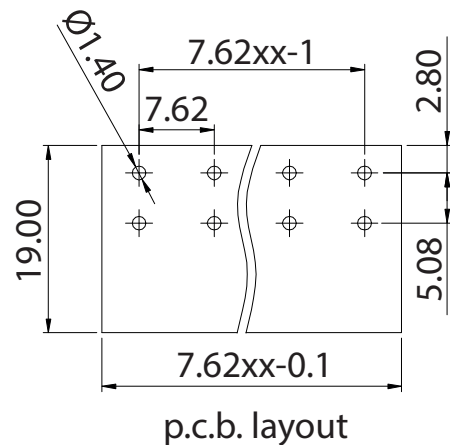

## Approvals

## Electrical

|                       |               |
|-----------------------|---------------|
| Rated voltage         | 320V          |
| Rated current         | 20A           |
| Contact resistance    | 20mΩ          |
| Insulation resistance | 500MΩ/DC500V  |
| Withstanding voltage  | AC1600V/1 min |
| Wire range            |               |

|                  |                  |
|------------------|------------------|
| Torque           |                  |
| Temp. Range      | -40°C+105°C      |
| Stripping length |                  |
| Max sold. time   | +250°C for 5 sec |

## Dimensions

|       |         |
|-------|---------|
| Pitch | 7.62 mm |
| Poles | 2÷16    |

## Material

|            |                          |
|------------|--------------------------|
| Housing    | PA66 UL94V0              |
| Pin        | Copper Alloy, tin plated |
| Cage       |                          |
| Screws     |                          |
| Side Block |                          |
| Nut screw  |                          |
| Clamp      |                          |

## General description of ordering code

| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| CMA    | 02÷16    | -7.62 | -H      |       |        |

## Version Date

|       |          |
|-------|----------|
| 01/23 | 24/11/23 |
|-------|----------|



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

**CMA-7.62-H**