

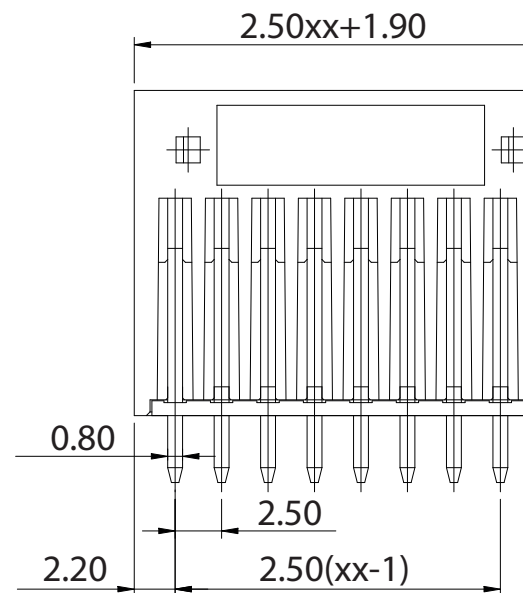
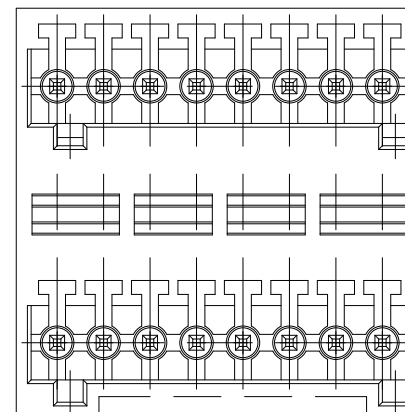


2 pole version

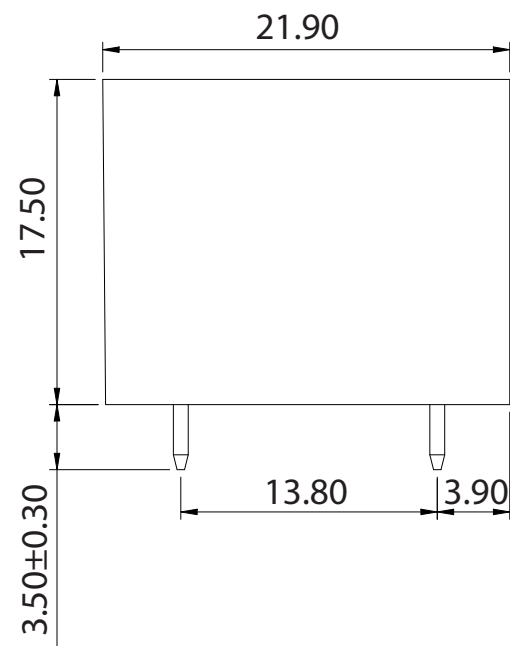

Approvals

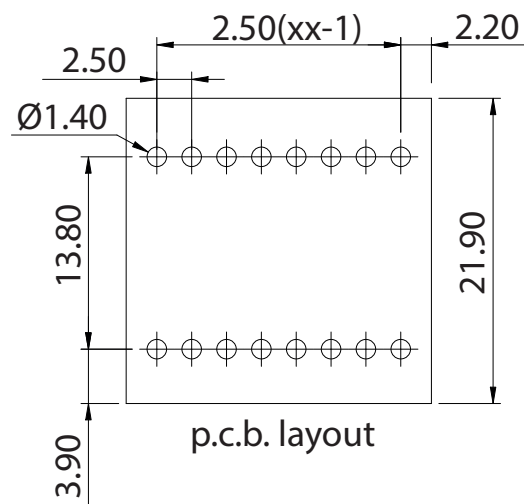

5A-150V

Electrical

Rated voltage IEC	160V
Rated current IEC	5A
Rated voltage UL	150V
Rated current UL	5A

Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1300V1 min
Wire range	

Torque	
Temp. Range	-40°C+105°C
Stripping lenght	
Max sold. time	+250°C for 5 sec

Dimensions

Pitch	2,5 mm
Poles	2+2÷24+24

Material

Housing	PA66 UL94V0
Pin	Copper Alloy, tin plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
MDL	02÷24	-2.5	-V		

Version Date

01/26

27/02/26



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

MDL-2.5-V