


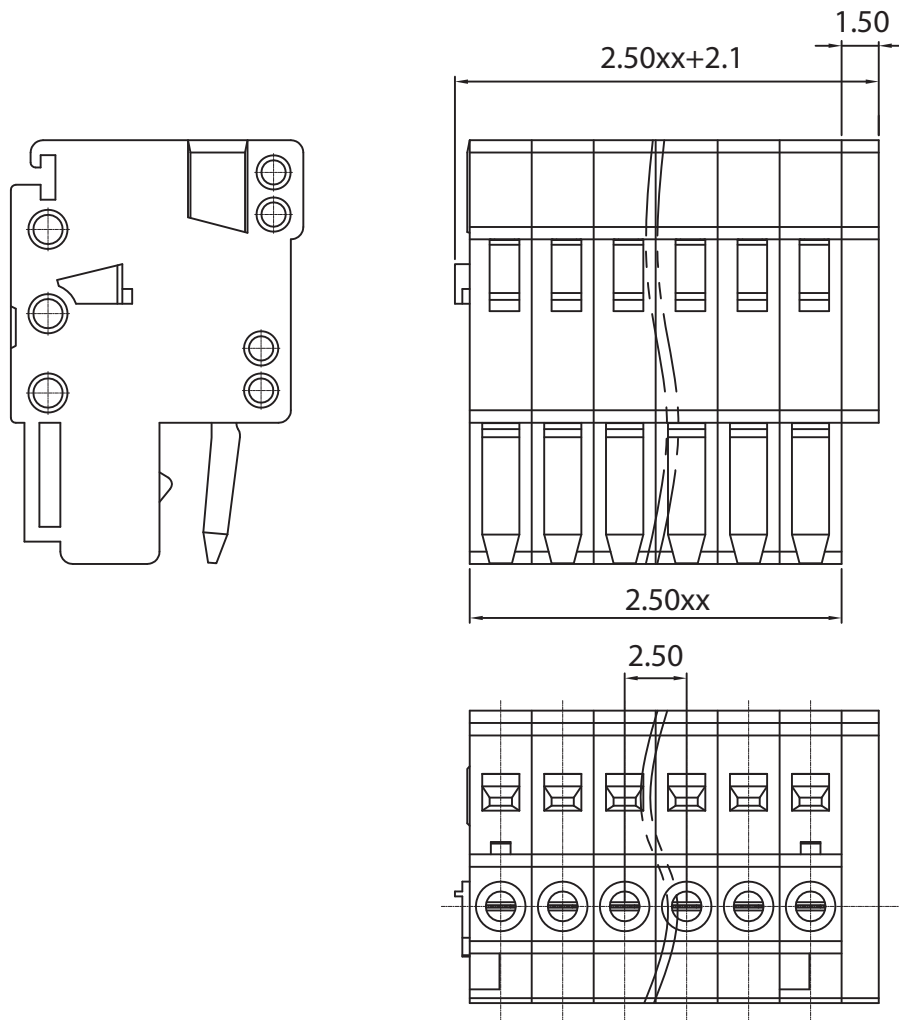

Approvals

UL File n. E342315 4A-150V

Electrical

Rated voltage 160V
Rated current 6A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC2000V/1 min
Wire range 28-20AWG 0,5mm²

Torque
Temp. Range -40°C+105°C
Stripping length 5 mm
Max sold. time

Dimensions

Pitch 2,5mm
Poles 2÷12

Material

Housing PA66 UL94V0
Pin Copper Alloy, tin plated
Cage
Screws
Side Block
Nut screw
Clamp Stainless Steel

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFP1	02÷12	-2.5			

Version Date

01/23

23/06/23



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CFP1-2.5