

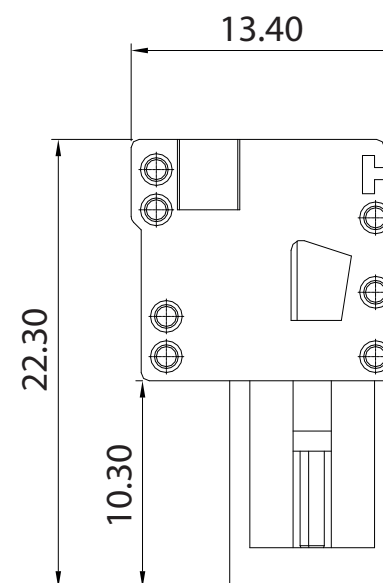


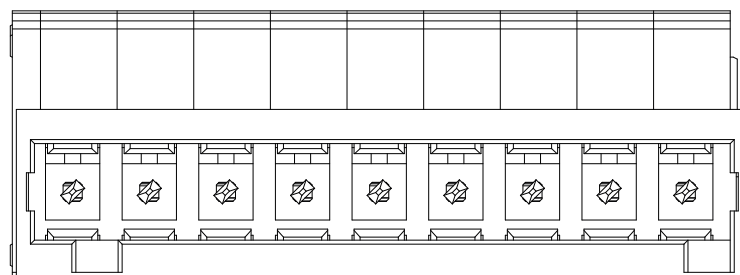

Approvals

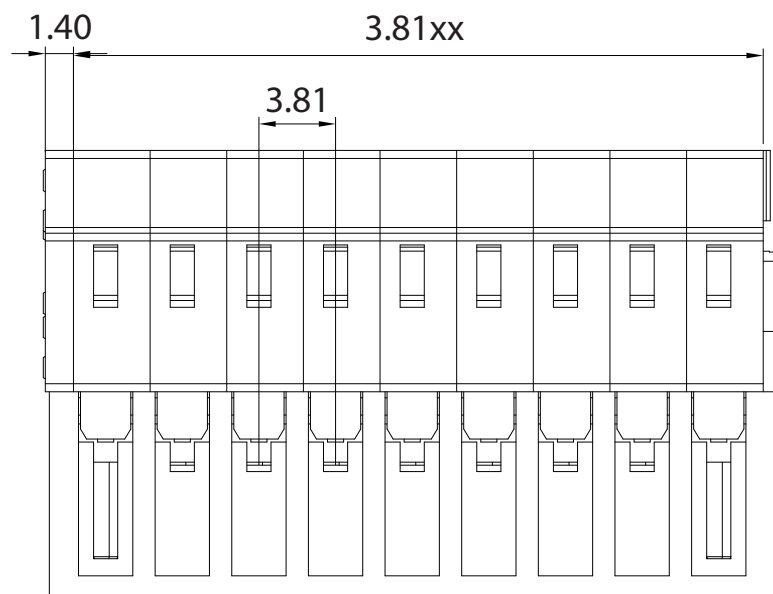

File n. E342315

10A-300V

Electrical

Rated voltage	130V
Rated current	10A
Contact resistance	20mΩ
Insulation resistance	500mΩ/DC500V
Withstanding voltage	AC1600V/1 min
Wire range	28-14AWG 1,5mm ²

Torque	
Temp. Range	-40°C+105°C
Stripping length	6 mm
Max sold. time	

Dimensions

Pitch	3,81 mm
Poles	2÷24

Material

Housing	PA66, UL94V0
Pin	
Cage	Copper Alloy, Sn plated
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFP3	02÷24	-3.81			

Version Date

01/23

23/06/23



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CFP4-3.81