

Approvals

UL File n. E342315 10A-300V

Electrical

Rated voltage 130V
 Rated current 10A
 Contact resistance 20mΩ
 Insulation resistance 500mΩ/DC500V
 Withstanding voltage AC1600V/1 min
 Wire range 28-14AWG 1,5mm²

Torque
 Temp. Range -40°C+105°C
 Stripping lenght 6 mm
 Max sold. time

Dimensions

Pitch 3,81 mm
 Poles 2÷24

Material




Housing PA66, UL94V0
 Pin
 Cage Copper Alloy, Sn plated
 Screws
 Side Block
 Nut screw
 Clamp

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFP3	02÷24	-3.81	-P		

Version Date

01/23 23/06/23

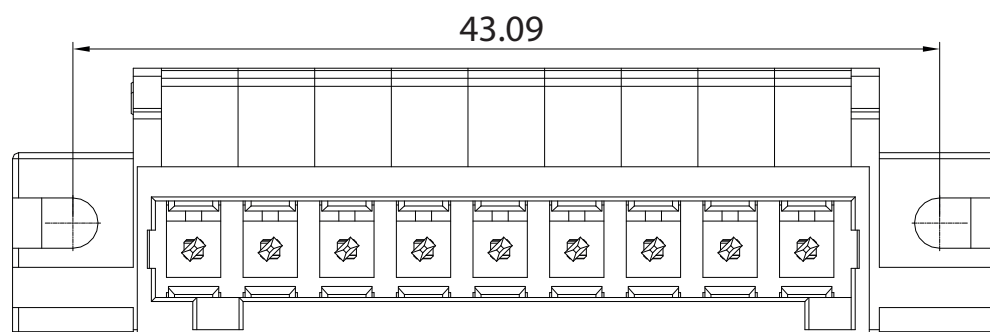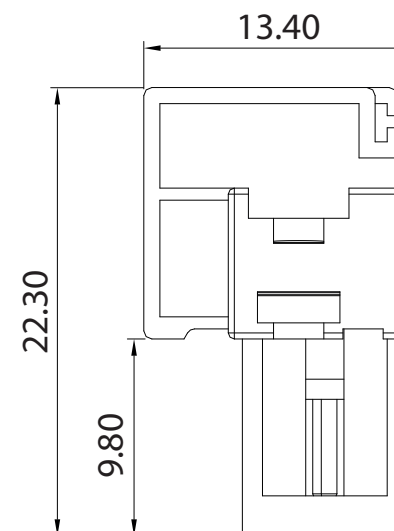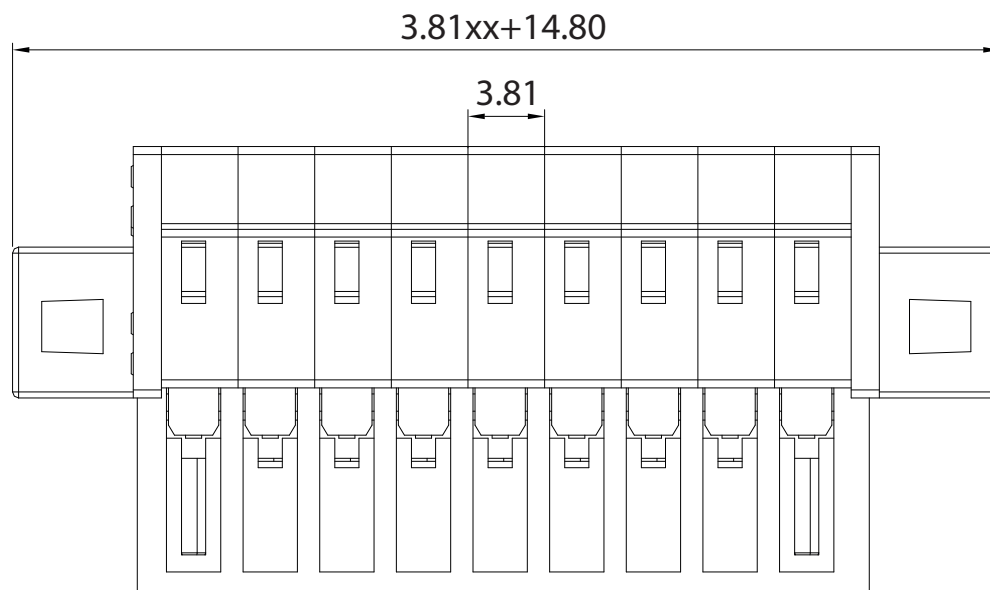

euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CFP4-3.81-P