

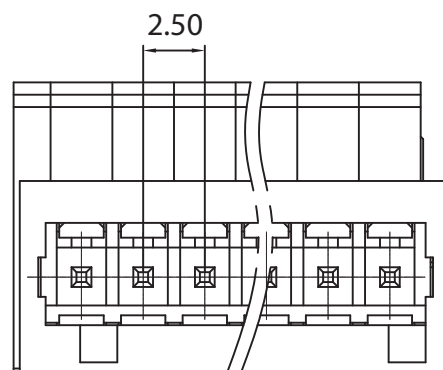
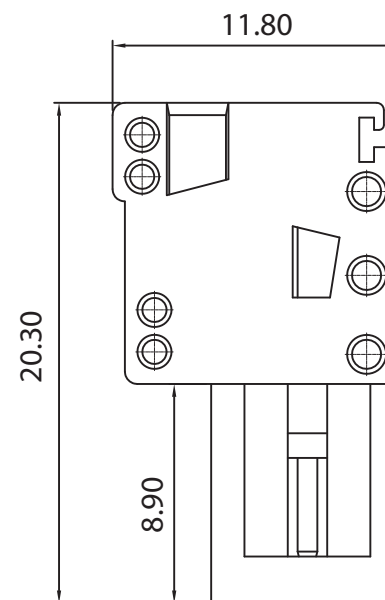


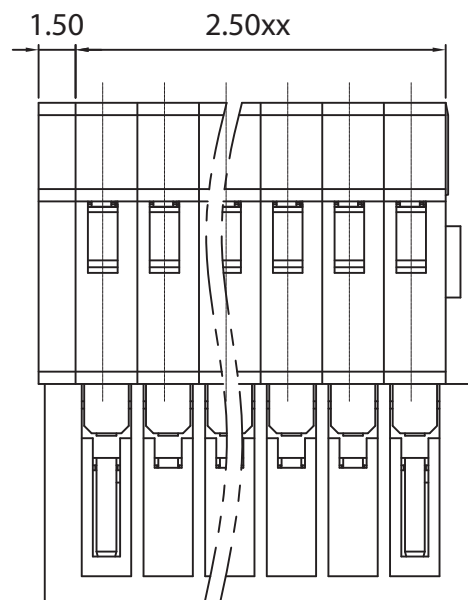

Approvals

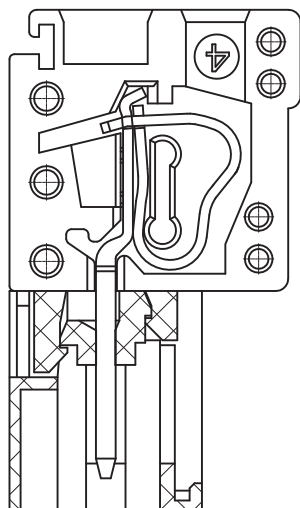

File n. E342315

4A-150V

Electrical

Rated voltage	160V
Rated current	6A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V/1 min
Wire range	28-20AWG 0,5mm ²

Torque	
Temp. Range	-40°C+105°C
Stripping length	5 mm
Max sold. time	

Dimensions

Pitch	2,5mm
Poles	2÷12

Material

Housing	PA66 UL94V0
Pin	Copper Alloy, tin plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	Stainless Steel

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFP3	02÷12	-2.5			

Version Date

02/23

23/06/23



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CFP3-2.5