
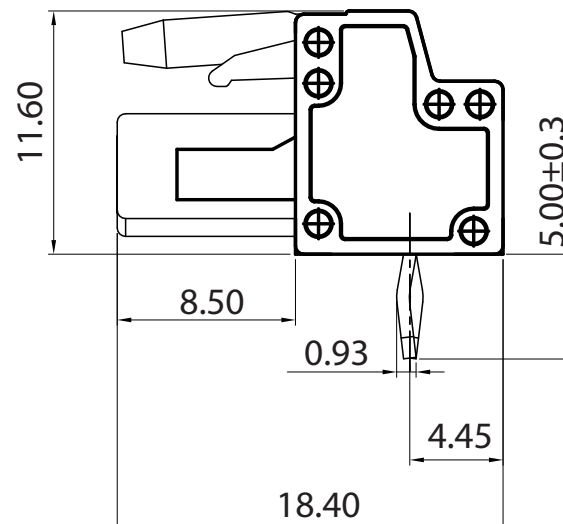
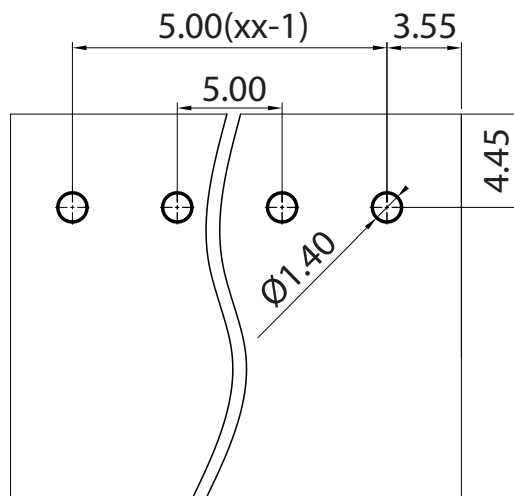
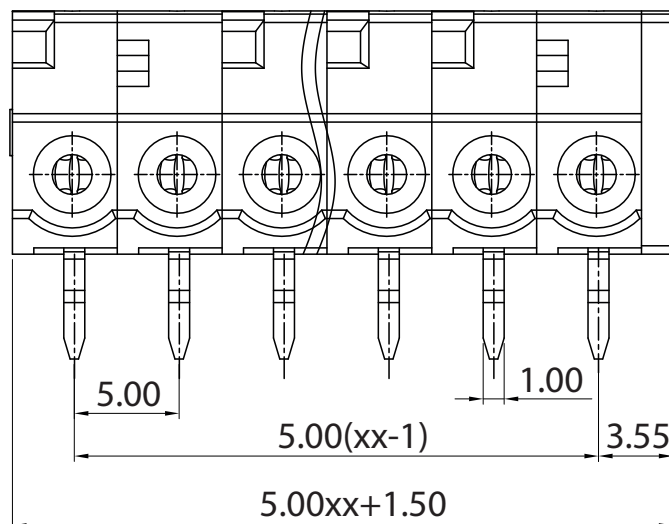


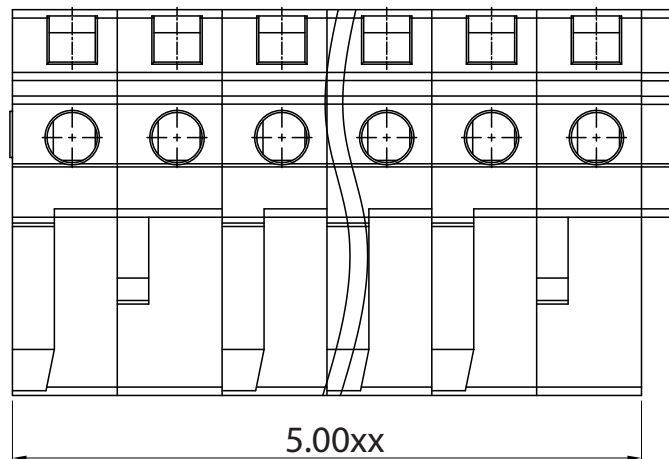

Approvals

UL File n. E342315 15A-300V

Electrical

Rated voltage 250V
Rated current 12A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC1600V/1 min
Wire range

Torque
Temp. Range -40°C+105°C
Stripping length 8 mm
Max sold. time

Dimensions

Pitch 5 mm
Poles 2÷24

Material

Housing PA66 UL94V0
Pin Copper alloy, Sn plated
Cage
Screws
Side Block
Nut screw
Clamp Stainless Steel

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CFM5	02÷24	-5	-H		

Version Date

01/23 23/06/23



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CFM5-5-H