
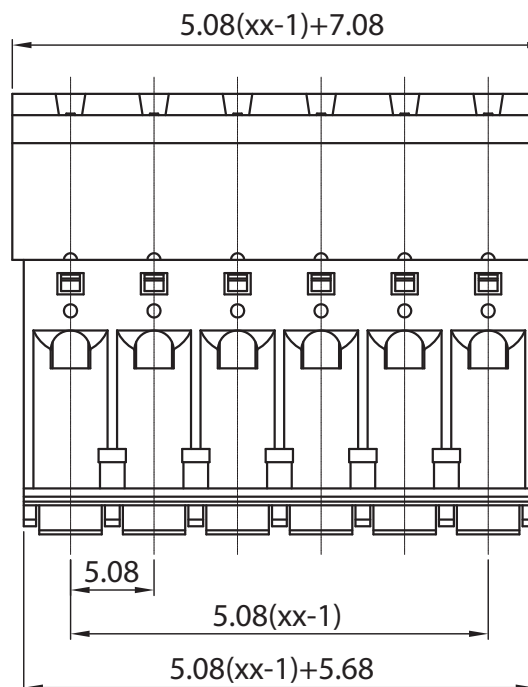
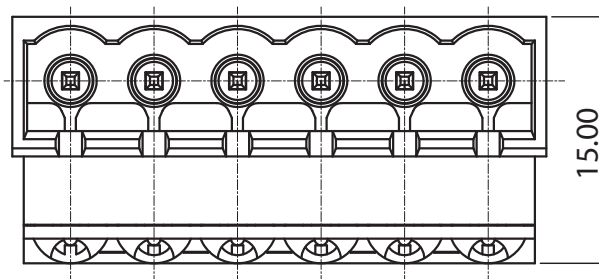
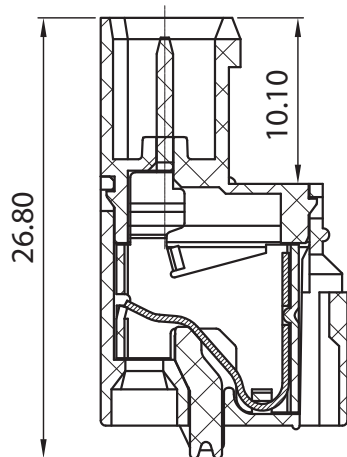


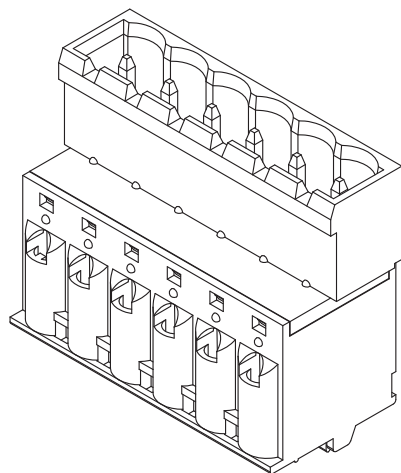

## Approvals

## Electrical

|                       |                              |
|-----------------------|------------------------------|
| Rated voltage         | 320V                         |
| Rated current         | 10A                          |
| Contact resistance    | 20mΩ                         |
| Insulation resistance | 500MΩ/DC500V                 |
| Withstanding voltage  | AC2000V/1 min                |
| Wire range            | 28-12 AWG 2.5mm <sup>2</sup> |

|                  |             |
|------------------|-------------|
| Torque           |             |
| Temp. Range      | -40°C+105°C |
| Stripping length | 7 mm        |
| Max sold. time   |             |

## Dimensions

|       |         |
|-------|---------|
| Pitch | 5,08 mm |
| Poles | 2÷24    |

## Material

|            |                         |
|------------|-------------------------|
| Housing    | PA66 UL94V0             |
| Pin        | Copper Alloy, Sn plated |
| Cage       |                         |
| Screws     |                         |
| Side Block |                         |
| Nut screw  |                         |
| Clamp      | Stainless Steel         |

## General description of ordering code

| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| CFJ    | 02÷24    | -5.08 |         |       |        |

| Version | Date       |
|---------|------------|
| 01/21   | 01/10/2021 |



**euro-block**



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

**CFJ-5.08**