

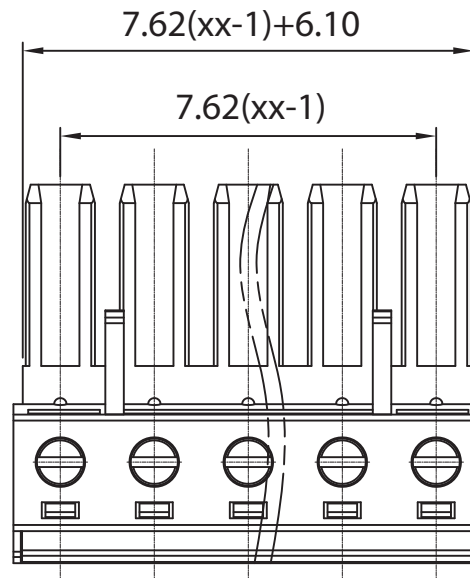
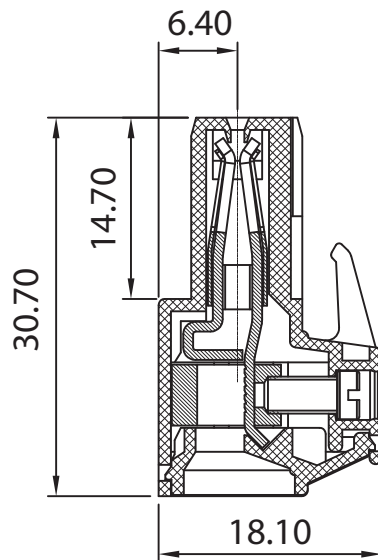


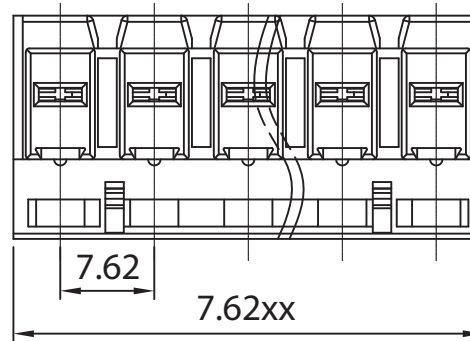

## Approvals

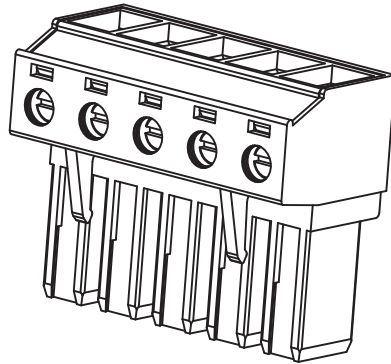

30A - 300V

## Electrical

|                       |                            |
|-----------------------|----------------------------|
| Rated voltage         | 400V                       |
| Rated current         | 32A                        |
| Contact resistance    | 20mΩ                       |
| Insulation resistance | 500MΩ/DC500V               |
| Withstanding voltage  | AC3000V/1 min              |
| Wire range            | 4mm <sup>2</sup> 28÷10 AWG |

|                  |                   |
|------------------|-------------------|
| Torque           | 0,5Nm (4,5 Lb in) |
| Temp. Range      | -40°C + 105°C     |
| Stripping length | 7 mm              |
| Max sold. time   | +250°C for 5 sec. |

## Dimensions

|       |         |
|-------|---------|
| Pitch | 7.62 mm |
| Poles | 2÷12    |

## Material

|            |                      |
|------------|----------------------|
| Housing    | PA66 UL94V0          |
| Pin        | ---                  |
| Cage       | Brass, Ni plated     |
| Screws     | M3, Steel, Zn plated |
| Side Block | ---                  |
| Nut screw  | ---                  |
| Clamp      | Stainless Steel      |

## General description of ordering code

| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| CFP    | 02÷12    | -7.62 |         |       |        |

## Version Date

01/24 25/09/24



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 1.5:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

**CFP-7.62**