

Approvals

Electrical

Rated voltage	1000V
Rated current	41A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V/1 min
Wire range	6mm2 24÷8 AWG
Torque	0,5Nm (4,5 Lb in)
Temp. Range	-40°C + 105°C
Stripping lenght	10 mm
Max sold. time	+250°C for 5 sec.

Dimensions

Pitch	7.62 mm
Poles	2÷10

Material





Housing	PA66 UL94V0
Pin	
Cage	Copper Alloy; Sn plated
Screws	M3, Steel, Zn plated
Side Block	
Nut screw	
Clamp	

General description of o rdering code

Series	n. Poles	Pitch	Version	Color	Custom
CPP	02÷10	-7.62	-F		

Version Date

01/23 21/02/2023

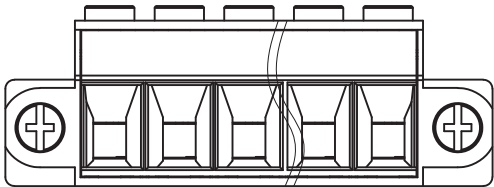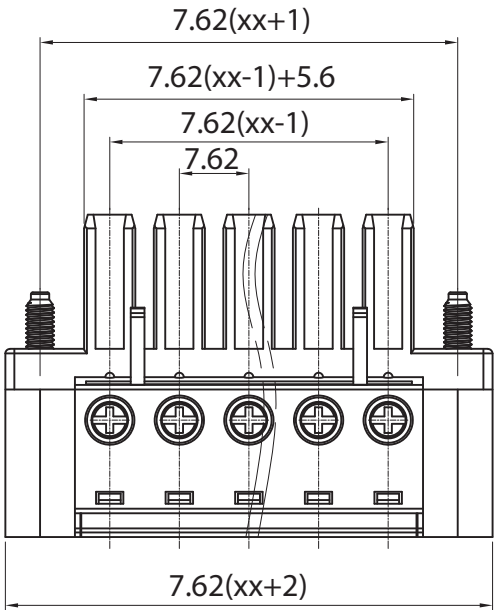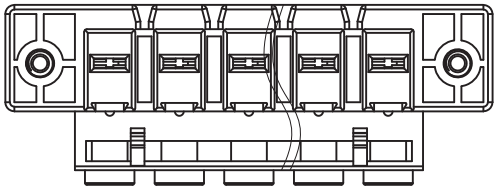

euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 1.5:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CPP-7.62-F