

Approvals

Electrical

Rated voltage	630V
Rated current	41A
Contact resistance	20Ω
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC1600V/1 min
Wire range	

Torque	
Temp. Range	-40°C + 105°C
Stripping lenght	
Max sold. time	+250°C for 5 sec.

Dimensions

Pitch	7,62 mm
Poles	2÷12

Material



Housing	PA66 UL94V0
Pin	Copper Alloy, Sn plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code




Series	n. Poles	Pitch	Version	Color	Custom
CPM	02÷12	-7.62	-VF		

Version Date

01/24 25/09/24

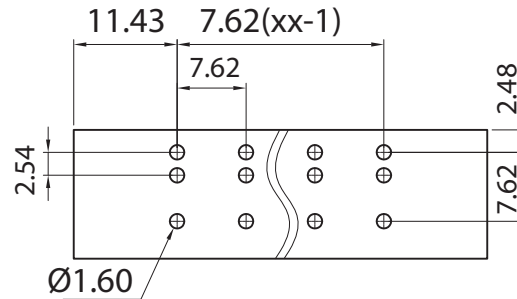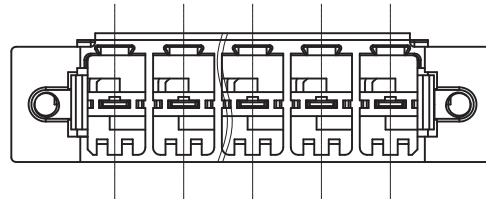

p.c.b. layout

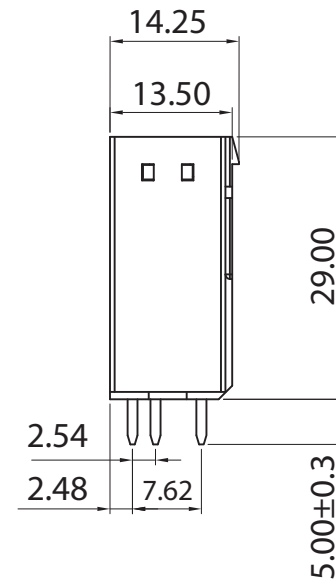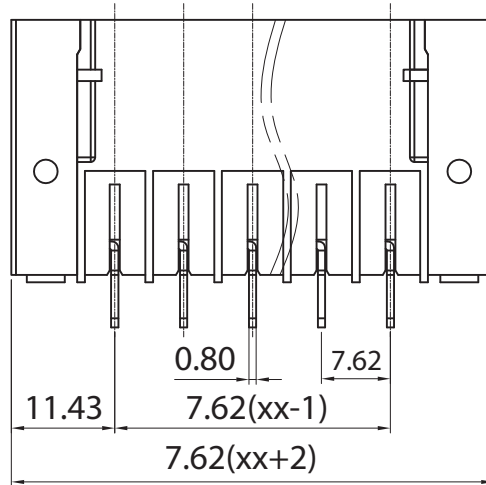

euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 1.5:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CPM-7.62-VF