
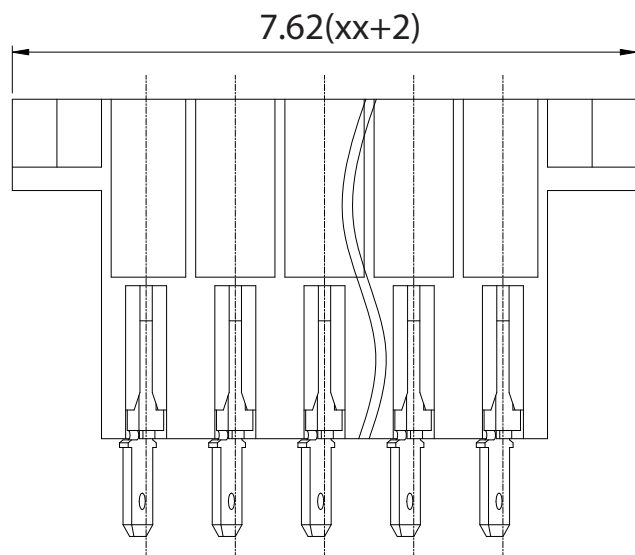


SECTION: A-A

Approvals

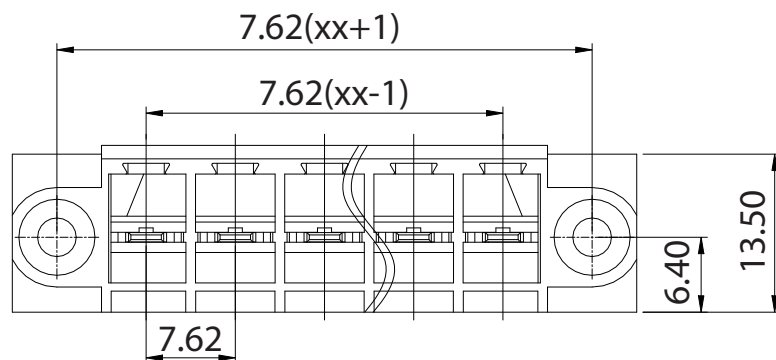

30A - 300V

Electrical

Rated voltage	400V
Rated current	32A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC3000V/1 min
Wire range	4mm ² 28÷10 AWG

Torque	0,5Nm (4,5 Lb in)
Temp. Range	-40°C + 105°C
Stripping length	7 mm
Max sold. time	+250°C for 5 sec.

Dimensions

Pitch	7.62 mm
Poles	2÷12

Material

Housing	PA66 UL94V0
Pin	---
Cage	Brass, Ni plated
Screws	M3, Steel, Zn plated
Side Block	---
Nut screw	---
Clamp	Stainless Steel

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CPK	02÷12	-7.62			

Version Date

01/24

25/09/24



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 1.5:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CPK-7.62