

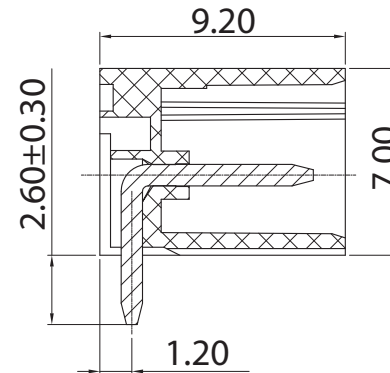
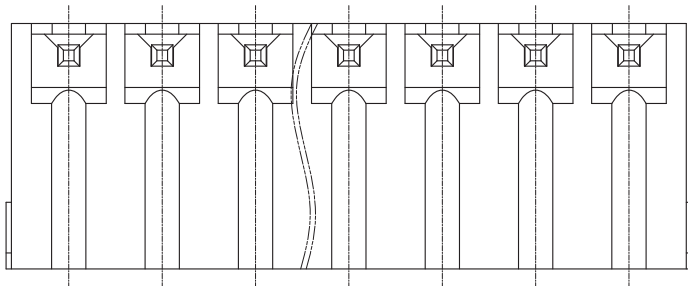
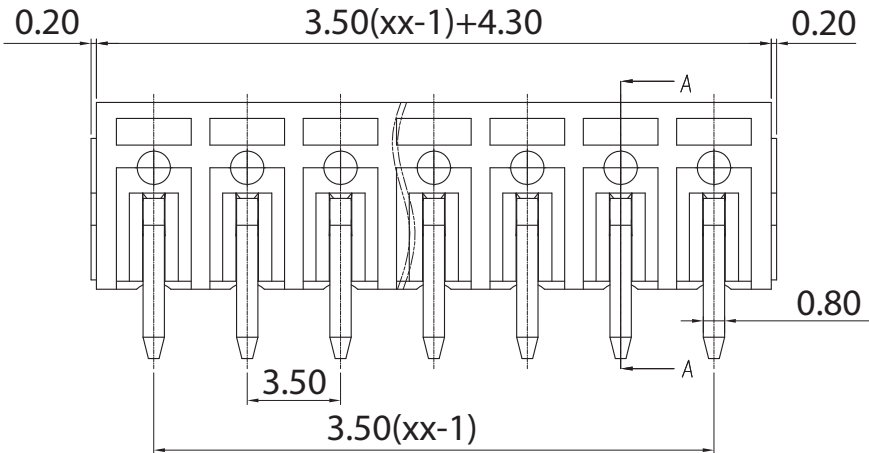


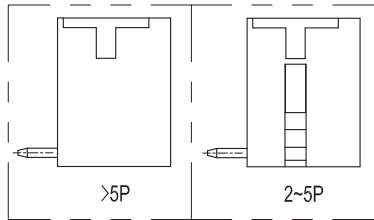

SECTION: A-A

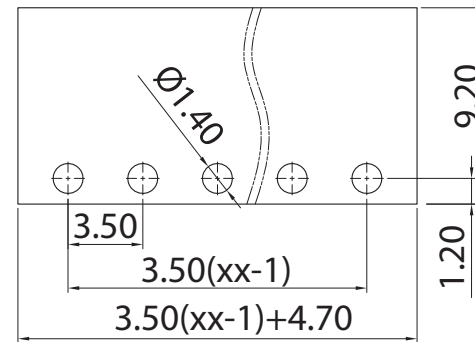

p.c.b. layout

Approvals



8A-300V

Electrical

Rated voltage	250V
Rated current	10A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1min
Wire range	

Torque	
Temp. Range	-40°C + 105°C
Stripping length	
Max sold. time	+285°C for 10 sec

Dimensions

Pitch	3.5mm
Poles	2÷24

Material

Housing	LCP, UL94 V0
Pin	Copper alloy, tin plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CCM	02÷24	-3.5	-CH		-TH

Version Date

01/24 08/11/24



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

CCM-3.5-CH-TH