

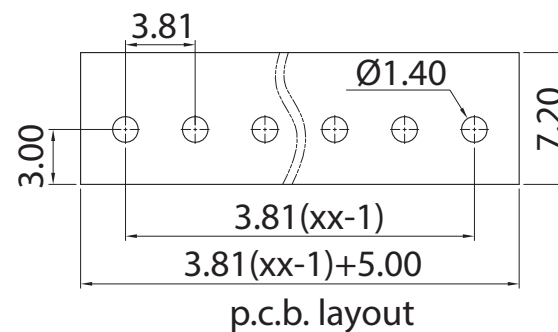
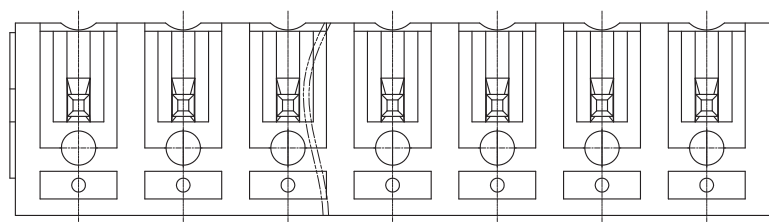
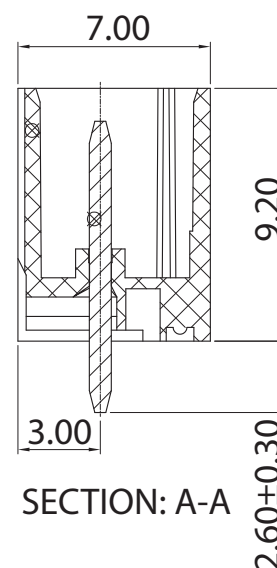
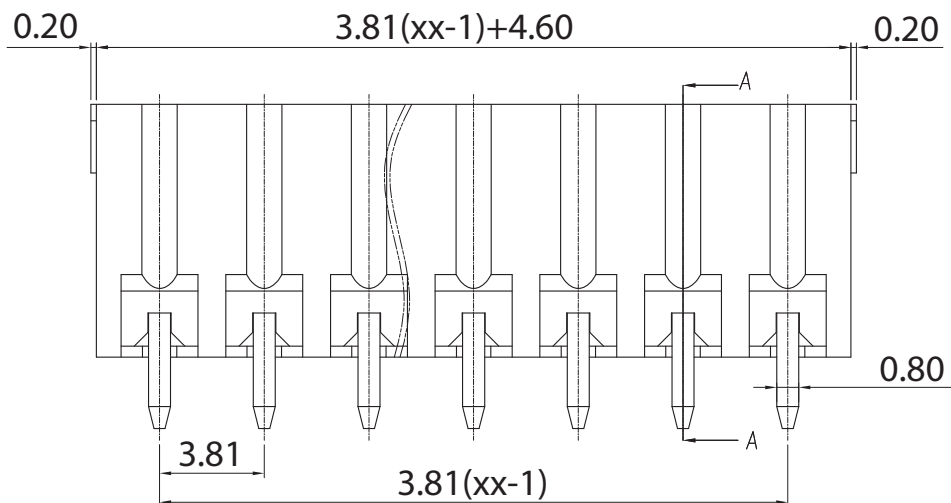


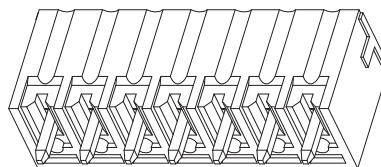

Approvals



8A-300V

Electrical

Rated voltage	250V
Rated current	10A
Contact resistance	20mΩ
Insulation resistance	500MΩ/DC500V
Withstanding voltage	AC2000V/1 min
Wire range	---

Torque	---
Temp. Range	-40°C + 105°C
Stripping length	---
Max sold. time	+285°C for 10 sec.

Dimensions

Pitch	3,81
Poles	2÷24

Material

Housing	LCP, UL94V0
Pin	Copper Alloy, Tin plated
Cage	---
Screws	---
Side Block	---
Nut screw	---
Clamp	---

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
CCM	02÷24	-3.81	-CV		-TH

Version Date

01/24

08/11/24



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 3:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



CCM-3.81-CV-TH