

FEATURES AND APPLICATIONS

- Deep UV wavelength, highly consistent
- HVPE epitaxy process, patent protected, unique in the industry
- UV lamps for medical/biomedical uses, sensors, and scientific applications
- RoHS compliant

SPECIFICATIONS

| Item | Symbol Maximum Rating | | Unit | | | | |
|------------------------|-----------------------|-------------|------|--|--|--|--|
| DC Forward Current | I_{f} | 30 | mA | | | | |
| Pulse Forward Current* | I _{fp} | 80 | mA | | | | |
| Reverse Voltage | Vr | 5 | V | | | | |
| Operating Temperature | T _{opr} | -20 to +80 | °C | | | | |
| Storage Temperature | T _{stg} | -40 to +100 | °C | | | | |


Absolute Maximum Rating (Ta = 25° C)

*Condition: Duty Cycle: 1/10, Pulse Width: 10msec

| | | | | • | | , |
|-------------------|------------------|----------------------|-----|------|-----|------|
| Item | Symbol | Condition | Min | Тур. | Max | unit |
| Forward Voltage | V_{f} | I _f =20mA | 3.6 | 4.3 | 5.0 | V |
| Reverse Current | Ir | V _r =5V | - | - | 100 | μA |
| Peak Wavelength | Яp | I _f =20mA | 350 | 351 | 353 | nm |
| Viewing Angle | | I _f =20mA | - | 15 | - | deg. |
| Output Power/Flux | Po | I _f =20mA | 100 | 200 | 350 | μW |

Optical and Electrical Characteristics (Ta = 25°C)

Lamp Dimensions (typical)

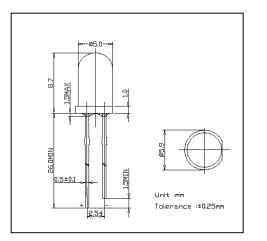

- Soft polymer lens, 5 mm (T-1 3/4 package), UV resistant
- Water clear


Rev. F, Jan. 2014

The Fox Group, Inc. 54 Jennie Dade Lane Sperryville VA 22740 Tel: (540) 987-8271 Fax: (540) 987-9444 sales@thefoxgroupinc.com

FoxUVTM 350nm LED 5mm Soft Lens FG350-R5--WC015S



Typical Spectrum

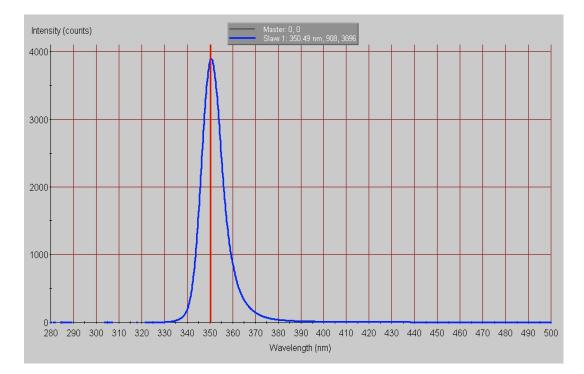

Warnings and Handling Instructions

- UV LEDs emit intense but mainly invisible ultraviolet radiation when in operation, which may be harmful to eyes, even for brief periods.
- * DO NOT LOOK DIRECTLY INTO THE UV LED DURING OPERATION *
- * BE SURE THAT YOU AND ALL PERSONS IN THE VICINITY WEAR SAFETY GOGGLES THAT PROVIDE SUITABLE UV PROTECTION WHEN A UV LED IS OPERATING *
- * KEEP CHILDREN AWAY FROM THE OPERATING VICINITY *
- * KEEP UV LEDS OUT OF THE REACH OF CHILDREN *
- If you incorporate a UV LED into a product, be sure to provide appropriate cautionary labels and instructions.
- Please follow all standard procedures for storing, handling, cleaning, mounting, soldering, disposal, or otherwise handling LED dies or packaged LEDs, including static electricity protection.

Rev. F, Jan. 2014

The Fox Group, Inc. 54 Jennie Dade Lane Sperryville VA 22740 Tel: (540) 987-8271 Fax: (540) 987-9444 sales@thefoxgroupinc.com