

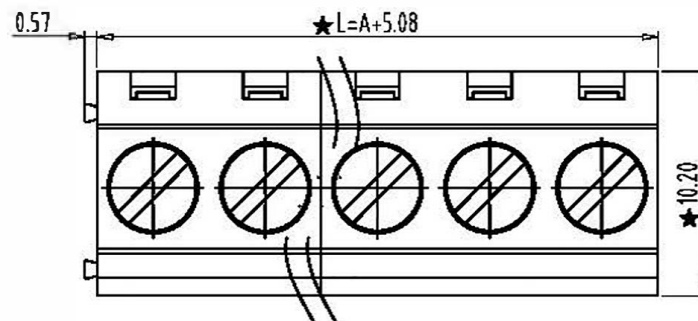
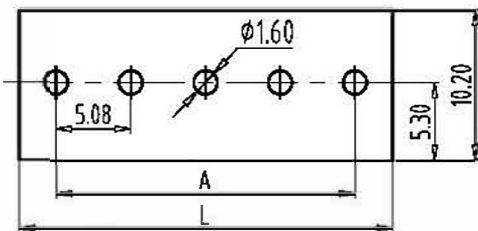
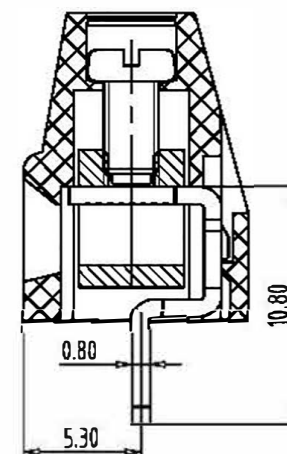


REV.	LOCAS.	DESCRIPTION	DATE	DRAWN
01		INITIAL RELEASE.		

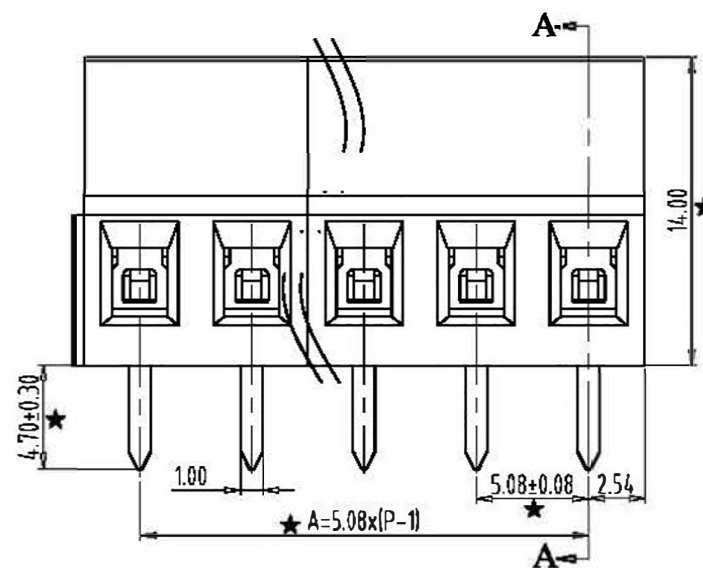


NOTES:

1. Rating:300V 10A;
2. Insulation Withstands Voltage:
AC2000V/MIN;
3. Insulation Resistance:
500MΩ or more at DC500V
4. Using Temperature Range:
-40°C/+105°C;
5. Screw Torque Vlaue:0.4N.m;
6. Suitable Electric Wire: 12-24AWG .
7. "★" is critical dimension to be controlled.

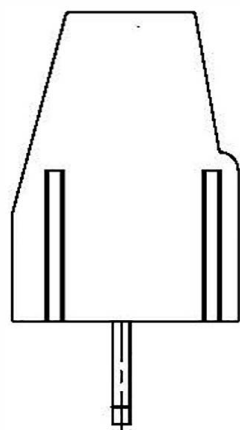

SECTION:A-A

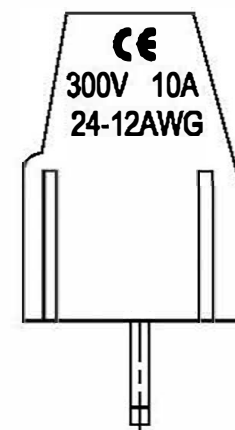

Central Components Manufacturing LLC
440 Lincoln Blvd, Middlesex, NJ 08846
Ph#732-469-5720 888-288-5152
Fax#732-469-1919

PART NO.	CMTB-TB508XX1024	DRAWN	MARK
DWG NO.	TB508-XX1024	CHECK	JOHN
TOLERANCE	X.±0.30 .X±0.25	APPROVE	MELODY
TITLE:	5.08mm接线端子	REV.	A0
	.XX±0.15 .XXX±0.10	SCALE	1:1
		UNIT	mm
		NO	

WIRE TO BOARD TERMINAL BLACK HORIZONTAL WITH BOARD
0.200"(5.08MM) THROUGH HOLE STYLE 1024

DESCRIPTION