

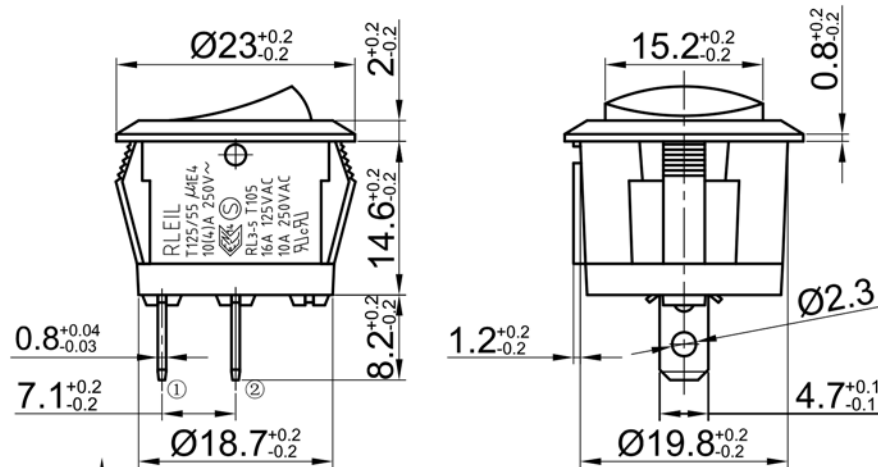




A




A

MATERIALS

1. HOUSING: Nylon #66 UL 94V-2
2. ROCKER: Nylon #66 UL 94V-2
3. TERMINAL: Copper Alloy Ag plated
4. CONTACTOR: $\text{AgSnO}_2\text{In}_2\text{O}_3$ (10) / Cu

CIRCUIT DIAGRAM




SPECIFICATION

1. RATING: UL C-UL: 16A 125VAC 10A 250VAC T105
ENEC SEMKO:
12(8)A 250VAC T85/55 1E4
10(4)A 250VAC T125/55 1E4
2. CIRCUIT: ON-OFF SPST 2P
3. CONTACT RESISTANCE: 30m OHMS Max
4. INSULATION RESISTANCE: DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE: AC 1500V 1 Minute
6. ELECTRICAL LIFE: 10000 Cycles at Full Load
7. OPERATION FORCE: 300~600gf
8. OPERATION TEMPERATURE RANGE: $-25^{\circ}\text{C} \sim +125^{\circ}\text{C}$

PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	20.2
1.25-2.0	20.4
2.0-3.0	20.6

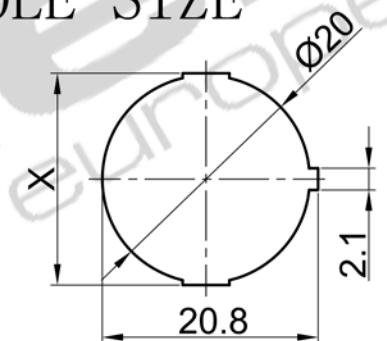

RL-35-11-H-2-BK/BK-P5-0

TITLE

ROCKER SWITCH

31-05-2017

SERIES

RL3-5

FUNCTION

ON-OFF

DRAWING NUMBER

RL-1464