


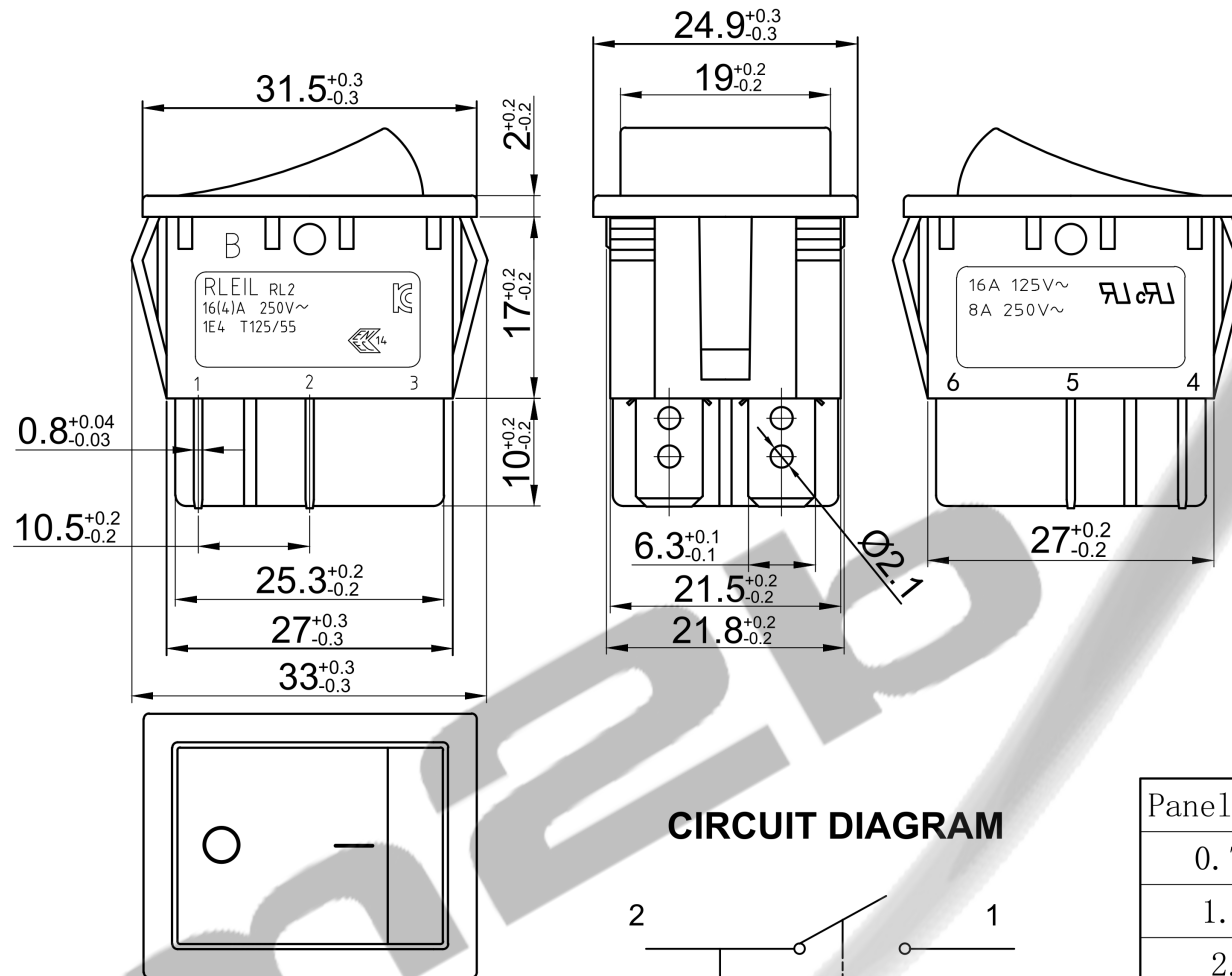


SPECIFICATION

1. RATING:UL C-UL:16A 125VAC
ENEC KC:
16(4)A 250VAC T125/55 1E4
2. CIRCUIT:ON-OFF W/Lamp DPST 4P 110VAC
3. CONTACT RESISTANCE:30m OHMS Max
4. INSULATION RESISTANCE:DC500V 100M OHMS Min
5. WITHSTAND VOLTAGE:AC 1500V 1 Minute
6. ELECTRICAL LIFE:10000 Cycles at Full Load
7. OPERATION FORCE:300~800gf
8. OPERATION TEMPERATURE RANGE:-25~+ 125° C


PANEL HOLE SIZE

Panel thickness	X
0.75-1.25	30
1.25-2.0	30.2
2.0-3.0	30.5

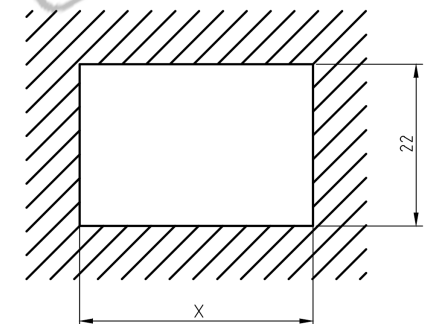

MATERIALS

1. HOUSING:Nylon #66 UL 94V-2
2. ROCKER:PC UL 94HB
3. TERMINAL:Copper Alloy Ag plated
4. CONTACTOR:AgSnO₂In₂O₃(10)/Cu

	RL-23-21/N-C-2-RE/BK-P2-1		
	TITLE	ROCKER SWITCH	SERIES RL2-3
	FUNCTION	ON-OFF W/Lamp	
	VIEWS TYPE		29-09-2025