


## SPECIFICATION

- RATING:UL C-UL:15A 125VAC/7.5A 250VAC  
ENEC :  
16(4)A 250VAC T125/55 1E4
- CIRCUIT:ON-OFF SPST 2P
- CONTACT RESISTANCE:30m OHMS Max
- INSULATION RESISTANCE:DC500V 100M OHMS Min
- WITHSTAND VOLTAGE:AC 1500V 1 Minute
- ELECTRICAL LIFE:10000 Cycles at Full Load
- OPERATION FORCE:400~700gf
- OPERATION TEMPERATURE RANGE:-25~+125° C

## PANEL HOLE SIZE

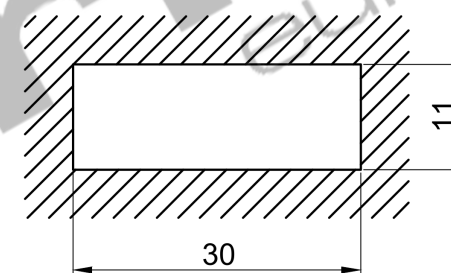

## MATERIALS

- HOUSING:Nylon #66 UL 94V-2
- ROCKER:PC UL 94HB
- TERMINAL:Copper Alloy Ag plated
- CONTACTOR:AgSnO<sub>2</sub>In<sub>2</sub>O<sub>3</sub>(10)/Cu



RL-13W-11-C-3-BK/BK-P2

TITLE

ROCKER SWITCH

VIEWS TYPE



SERIES

RL1-3 (W)

FUNCTION

ON-OFF

08-10-2025