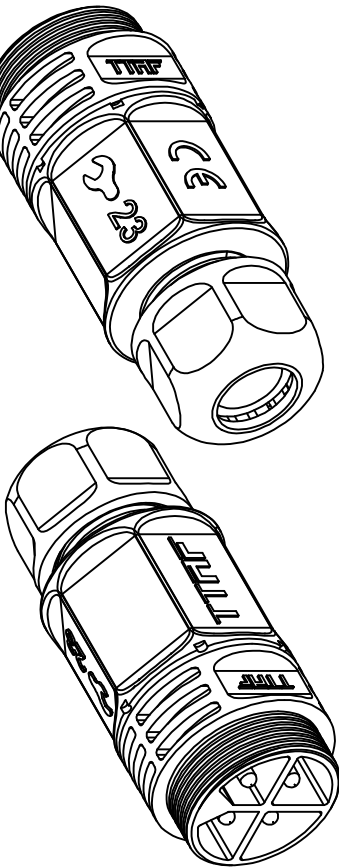
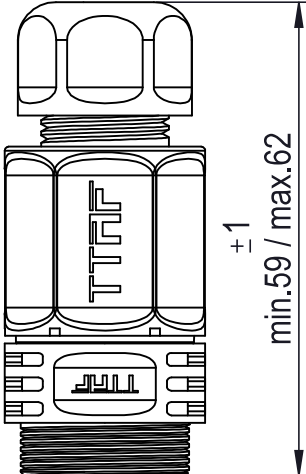


1		2		3		4		5		6																																																																																																													
A		B		C		D		A4																																																																																																															
TOL. UNLESS SPECIAL SEE STANDARD TOLERANCE <table><tr><th>NOMINAL DIMENSION</th><th>0-30</th><th>30-100</th><th>100-200</th><th>200-400</th><th>400-1000</th></tr><tr><td>0</td><td>± 0.1</td><td>± 0.2</td><td>± 0.3</td><td>± 0.5</td><td>± 1</td></tr><tr><td>0.0</td><td>± 0.05</td><td>± 0.05</td><td>± 0.1</td><td>± 0.2</td><td>± 0.3</td></tr><tr><td>0.00</td><td>± 0.01</td><td>± 0.02</td><td>± 0.05</td><td>± 0.05</td><td>± 0.1</td></tr></table>		NOMINAL DIMENSION	0-30	30-100	100-200	200-400	400-1000	0	± 0.1	± 0.2	± 0.3	± 0.5	± 1	0.0	± 0.05	± 0.05	± 0.1	± 0.2	± 0.3	0.00	± 0.01	± 0.02	± 0.05	± 0.05	± 0.1			 the cable O.D. used varies in size		Technical Specifications <table><tr><td>Number of Poles</td><td>4</td></tr><tr><td>Voltage Rating</td><td>250VAC max.</td></tr><tr><td>Current Rating</td><td>20A max.</td></tr><tr><td>Cable Cross Section Area</td><td>0,5 ~2,5mm²</td></tr><tr><td>Durability Voltage</td><td>3000VAC@60s.</td></tr><tr><td>Insulation Structure</td><td>500 MΩ at 500VDC</td></tr><tr><td>Contact Resistance</td><td>30 mΩ max.</td></tr><tr><td>Min Wire Size OD</td><td>6mm</td></tr><tr><td>Max Wire Size OD</td><td>10mm</td></tr><tr><td>Operating Temperature</td><td>-40°C ~ +85°C</td></tr><tr><td>IP Rating</td><td>IP68(10m / 60min.)</td></tr><tr><td>Mold Material</td><td>PA6</td></tr><tr><td>Contact/Terminal Material</td><td>Nickel-Plated Brass</td></tr><tr><td>Seal Material</td><td>Silicone</td></tr></table>		Number of Poles	4	Voltage Rating	250VAC max.	Current Rating	20A max.	Cable Cross Section Area	0,5 ~2,5mm ²	Durability Voltage	3000VAC@60s.	Insulation Structure	500 MΩ at 500VDC	Contact Resistance	30 mΩ max.	Min Wire Size OD	6mm	Max Wire Size OD	10mm	Operating Temperature	-40°C ~ +85°C	IP Rating	IP68(10m / 60min.)	Mold Material	PA6	Contact/Terminal Material	Nickel-Plated Brass	Seal Material	Silicone	<table><tr><td>Date</td><td>03.07.2018</td><td>Signature</td><td>Rev.</td><td>Revision Detail</td><td>Rev.Date</td><td>By</td><td>Drawing Description</td></tr><tr><td>Drawn</td><td>Zafer BOLLUKBASI</td><td></td><td>-</td><td></td><td>-</td><td>-</td><td rowspan="3">WPM-0400M20</td></tr><tr><td>Checked</td><td>Dilek TUNCER</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td>Approved</td><td>Talet SAHIM</td><td></td><td></td><td></td><td></td><td></td></tr><tr><td colspan="7"></td><td></td></tr><tr><td colspan="7"></td><td>Drawing No</td><td>Scale</td><td>Sheet</td></tr><tr><td colspan="7"></td><td>-</td><td>1:1</td><td>1/1</td></tr></table>		Date	03.07.2018	Signature	Rev.	Revision Detail	Rev.Date	By	Drawing Description	Drawn	Zafer BOLLUKBASI		-		-	-	WPM-0400M20	Checked	Dilek TUNCER						Approved	Talet SAHIM																					Drawing No	Scale	Sheet								-	1:1	1/1
NOMINAL DIMENSION	0-30	30-100	100-200	200-400	400-1000																																																																																																																		
0	± 0.1	± 0.2	± 0.3	± 0.5	± 1																																																																																																																		
0.0	± 0.05	± 0.05	± 0.1	± 0.2	± 0.3																																																																																																																		
0.00	± 0.01	± 0.02	± 0.05	± 0.05	± 0.1																																																																																																																		
Number of Poles	4																																																																																																																						
Voltage Rating	250VAC max.																																																																																																																						
Current Rating	20A max.																																																																																																																						
Cable Cross Section Area	0,5 ~2,5mm ²																																																																																																																						
Durability Voltage	3000VAC@60s.																																																																																																																						
Insulation Structure	500 MΩ at 500VDC																																																																																																																						
Contact Resistance	30 mΩ max.																																																																																																																						
Min Wire Size OD	6mm																																																																																																																						
Max Wire Size OD	10mm																																																																																																																						
Operating Temperature	-40°C ~ +85°C																																																																																																																						
IP Rating	IP68(10m / 60min.)																																																																																																																						
Mold Material	PA6																																																																																																																						
Contact/Terminal Material	Nickel-Plated Brass																																																																																																																						
Seal Material	Silicone																																																																																																																						
Date	03.07.2018	Signature	Rev.	Revision Detail	Rev.Date	By	Drawing Description																																																																																																																
Drawn	Zafer BOLLUKBASI		-		-	-	WPM-0400M20																																																																																																																
Checked	Dilek TUNCER																																																																																																																						
Approved	Talet SAHIM																																																																																																																						
																																																																																																																							
							Drawing No	Scale	Sheet																																																																																																														
							-	1:1	1/1																																																																																																														