

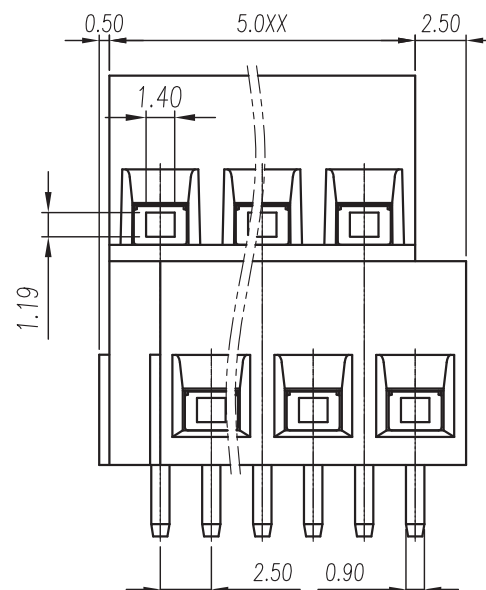
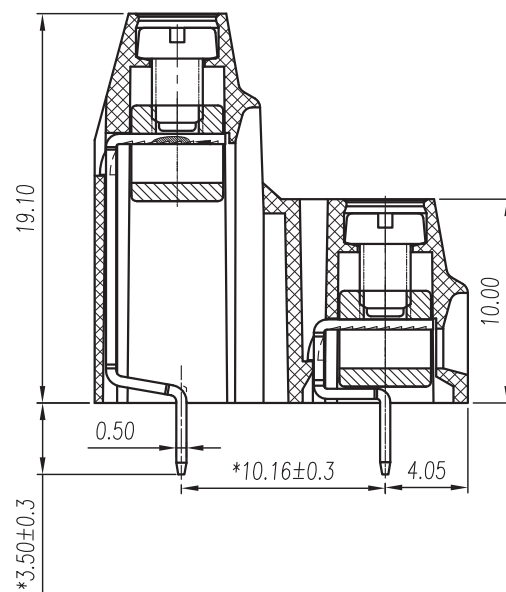


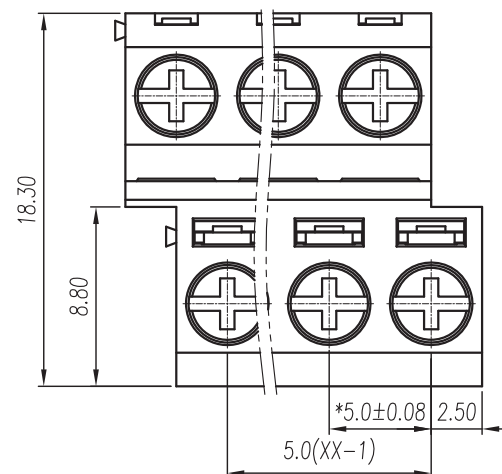

Approvals

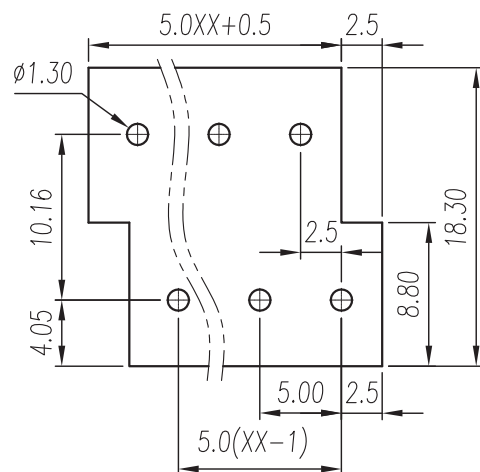

pending
not approved

Electrical

Rated voltage 250V
Rated current 17.5A
Contact resistance 20mΩ
Insulation resistance 500MΩ/DC500V
Withstanding voltage AC2000V/1 min
Wire range 1,5mm² 26÷16 AWG

Torque ---
Temp. Range -40°C + 105°C
Stripping length 6 mm
Max sold. time +250°C for 5 sec.

Dimensions

Pitch 5
Poles 2+2÷24+24

Material

Housing PA66 UL94V0
Pin Brass, Tin plated
Cage Brass, Ni plated
Screws M2,5; Steel Zn plated
Side Block ---
Nut screw ---
Clamp ---

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
MRD51	2÷24	-5	-V		

Version Date

16/01 12/05/2016



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 5:2

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



MRD51-5-V