

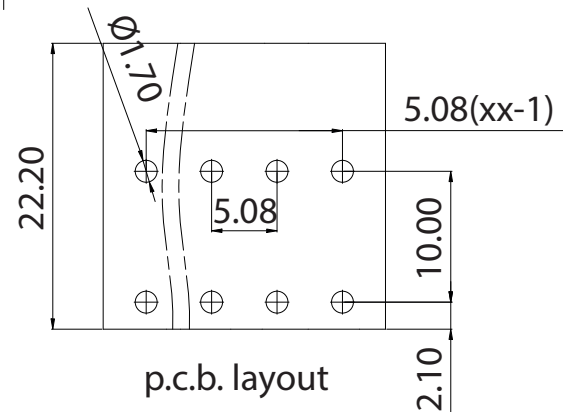
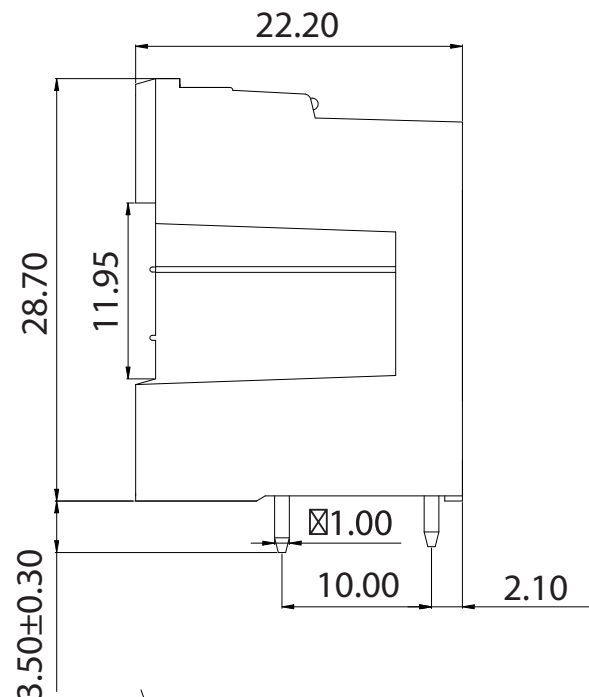


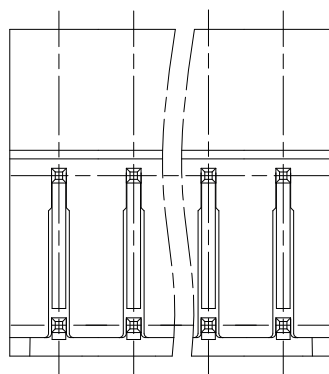

## Approvals

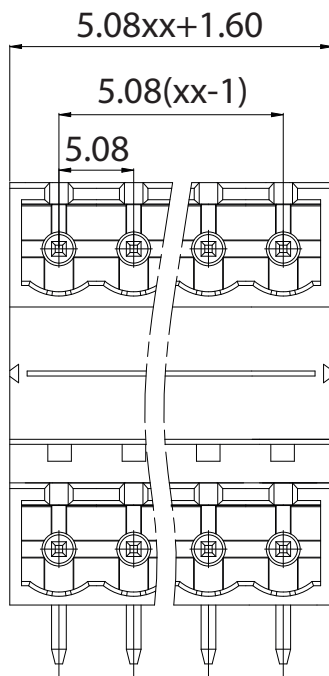

15A-300V

## Electrical

|                       |              |
|-----------------------|--------------|
| Rated voltage IEC     | 250V         |
| Rated current IEC     | 10A          |
| Contact resistance    | 20mΩ         |
| Insulation resistance | 500MΩ/DC500V |
| Withstanding voltage  | AC2000V1 min |
| Wire range            |              |

|                  |                  |
|------------------|------------------|
| Torque           |                  |
| Temp. Range      | -40°C+105°C      |
| Stripping length |                  |
| Max sold. time   | +250°C for 5 sec |

## Dimensions

|       |           |
|-------|-----------|
| Pitch | 5.08 mm   |
| Poles | 2+2÷24+24 |

## Material

|            |                          |
|------------|--------------------------|
| Housing    | PA66 UL94V0              |
| Pin        | Copper Alloy, tin plated |
| Cage       |                          |
| Screws     |                          |
| Side Block |                          |
| Nut screw  |                          |
| Clamp      |                          |

## General description of ordering code

| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| MDL    | 02÷24    | -5.08 | -H      |       |        |

## Version Date

01/26

11/06/26



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 10:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

MDL-5.08-H