



euroclamp

Se


Search

VIP log-in

You are here: [Home](#) / Product View

MPM1_-3,5-V

Screwless terminal block - Pitch 3,5mm - 2÷24 poles

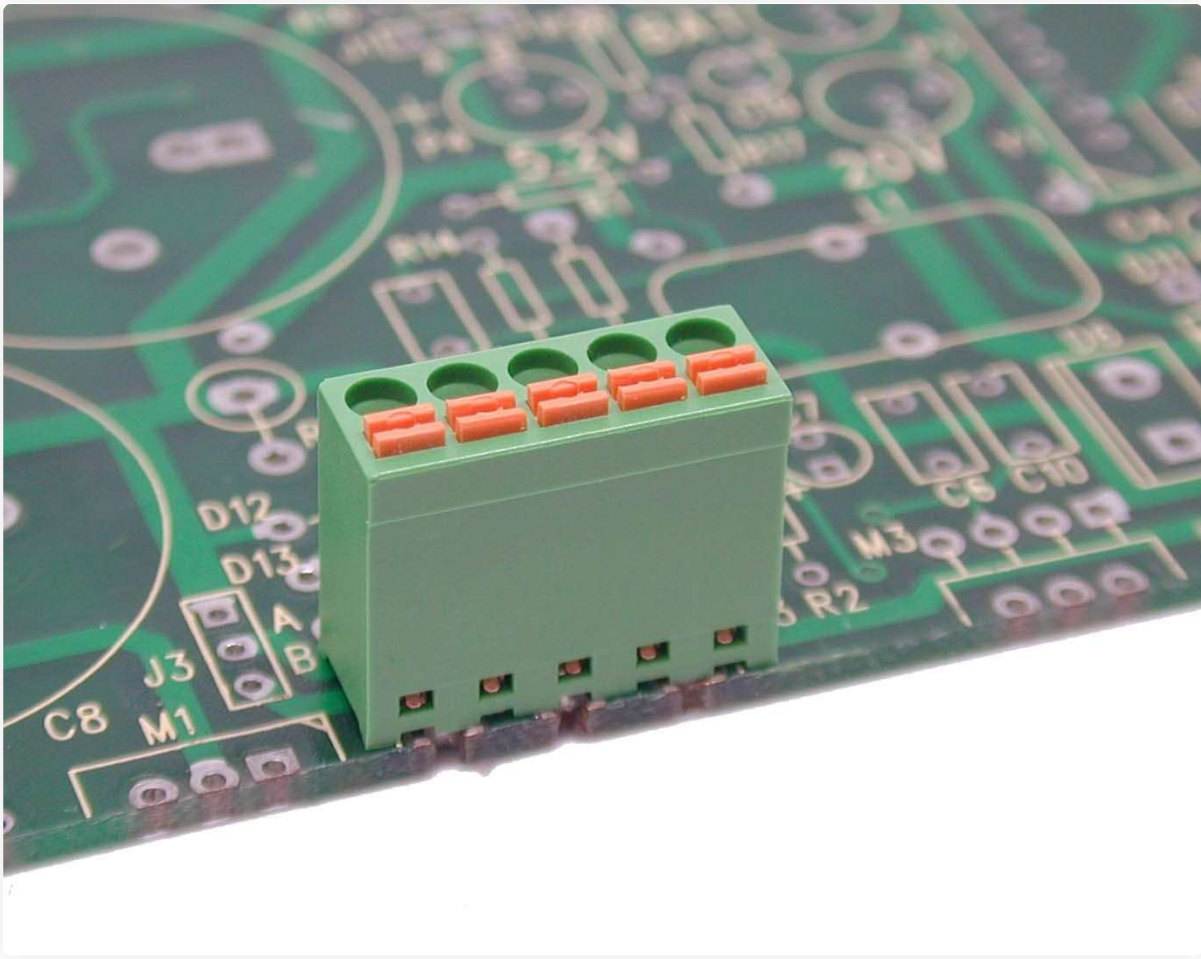

GENERAL INFORMATION

Pitch	3,5 mm
Height	15.1 mm



Depth	7.15 mm
Dimensional class	Bassa
Wire section	1.5 mm ² / 16 AWG
Clamp opening size	-
Wire stripping	max 12 mm
Operating temperature	-40 ÷ +130 °C

ELECTRICAL CHARACTERISTICS

Current	12 A
Voltage	130 V
test voltage	1.25 kVrms/60s

MECHANICAL CHARACTERISTICS

Screw Type	n/a
Recommended torque	-

APPROVALS DATA

			
Current	-	-	-
Voltage	-	-	-
Wire section	-	-	-
Torque	-	-	-
FILE	-	-	-

MATERIALS

Housing	PA - UL 94 V0
Screw	-
Clamp	-
Terminal	Tin-plated copper alloy
Scip Number	-



COLOURS	
Standard	On request
	     

POLES	NAME	3DFILE
02	MPM102-3,5-V	N/A
03	MPM103-3,5-V	N/A
04	MPM104-3,5-V	N/A
05	MPM105-3,5-V	N/A
06	MPM106-3,5-V	N/A
07	MPM107-3,5-V	N/A
08	MPM108-3,5-V	N/A
09	MPM109-3,5-V	N/A
10	MPM110-3,5-V	N/A
11	MPM111-3,5-V	N/A
12	MPM112-3,5-V	N/A
13	MPM113-3,5-V	N/A
14	MPM114-3,5-V	N/A
15	MPM115-3,5-V	N/A
16	MPM116-3,5-V	N/A
17	MPM117-3,5-V	N/A
18	MPM118-3,5-V	N/A
19	MPM119-3,5-V	N/A
20	MPM120-3,5-V	N/A
21	MPM121-3,5-V	N/A
22	MPM122-3,5-V	N/A
23	MPM123-3,5-V	N/A
24	MPM124-3,5-V	N/A

