


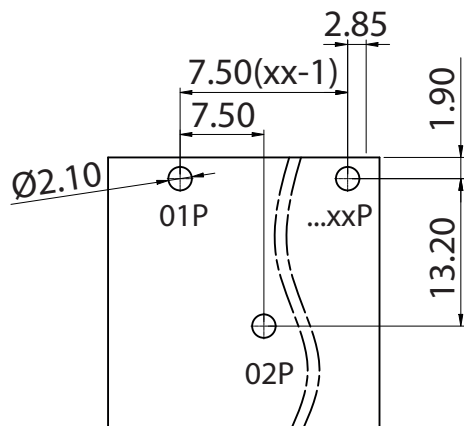
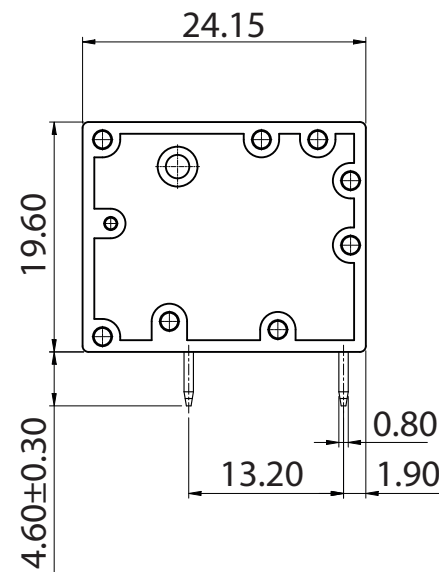


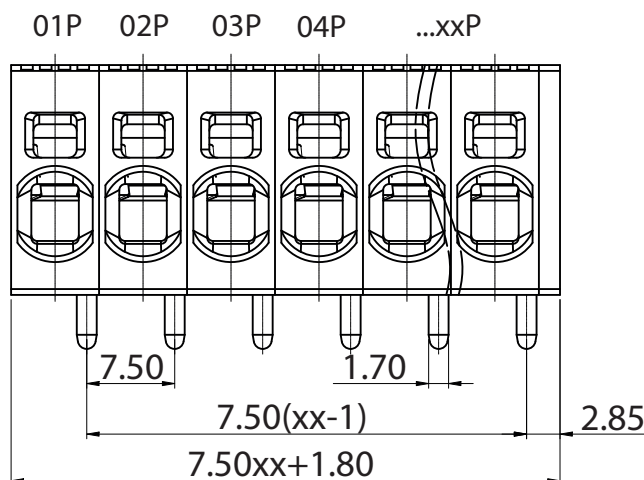

p.c.b. layout



Approvals

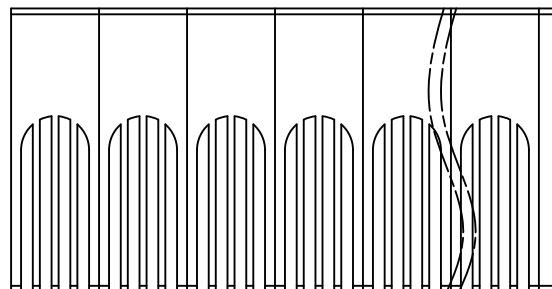

40A - 600V

Electrical

Rated voltage IEC	800V
Rated current IEC	41 A
Rated voltage UL	600V
Rated current UL	40 A
Contact resistance	20 mΩ
Insulation resistance	500 MΩ/DC 500 V
Withstanding voltage	AC 1600 V/1 min
Wire range	6 mm ² 24÷8 AWG

Torque	---
Temp. Range	-40°C + 105°C
Stripping lenght	16 mm
Max sold. time	+250°C for 5 sec.

Dimensions

Pitch	7.5 mm
Poles	2÷12

Material

Housing	PA66 UL94V0
Pin	Copper Alloy, Sn plated
Cage	---
Screws	---
Side Block	---
Nut screw	---
Clamp	Stainless Steel

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
MPM2	2÷12	-7.5	-HA		

Version Date

02/26

04/09/26



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 3:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

MPM2-7.5-HA