


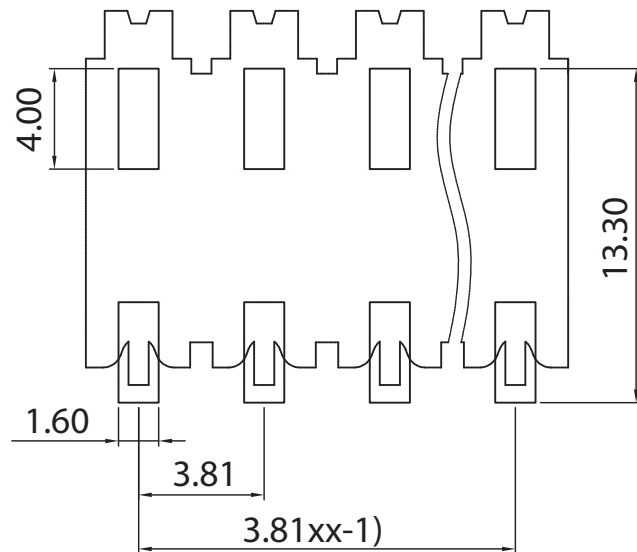


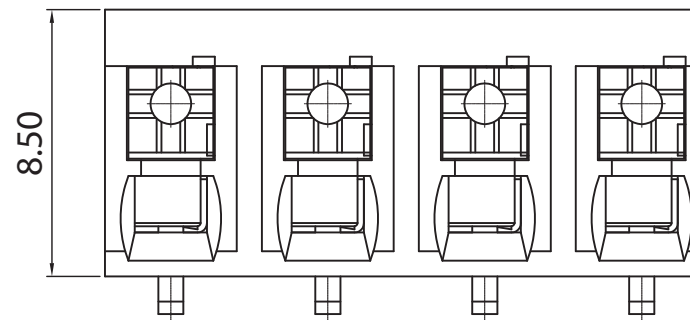

p.c.b. layout

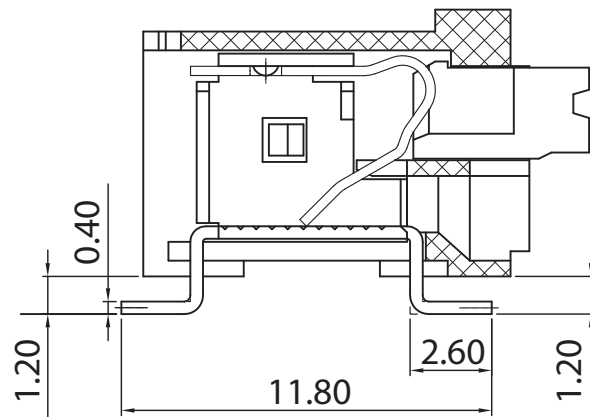

Approvals

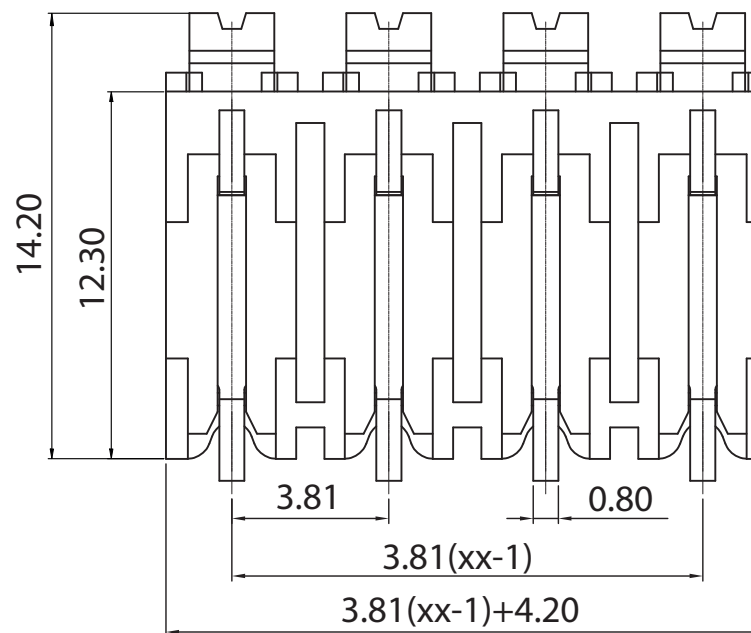

10A - 300V

Electrical

Rated voltage IEC	160 V
Rated current IEC	17.5 A
Contact resistance	20 mΩ
Insulation resistance	500 MΩ/DC 500 V
Withstanding voltage	AC 1600 V/1 min
Wire range	1,5 mm ² 24÷16 AWG

Torque	
Temp. Range	-40°C + 105°C
Stripping lenght	8 mm
Max sold. time	+285°C for 5 sec.

Dimensions

Pitch	3.81 mm
Poles	2÷24

Material

Housing	LCP UL94V0
Pin	Copper Alloy, Sn plated
Cage	
Screws	
Side Block	
Nut screw	
Clamp	Stainless Steel

General description of ordering code

Series	n. Poles	Pitch	Version	Color	Custom
MRMA1	2÷24	-3.81	HS		-TH

Version Date

02/26

03/09/26



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 3:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50

> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



First angle projection

MRMA1-3.81-HS-TH