

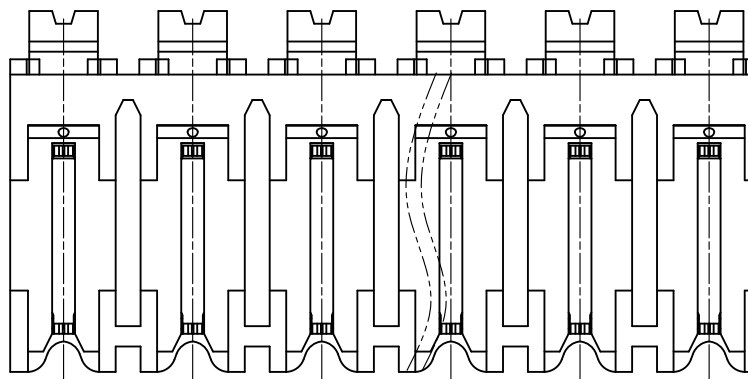
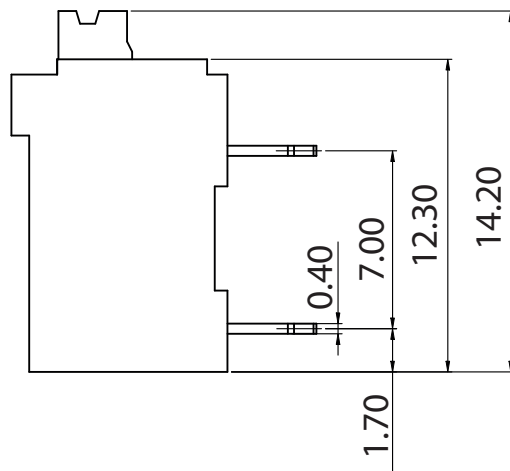


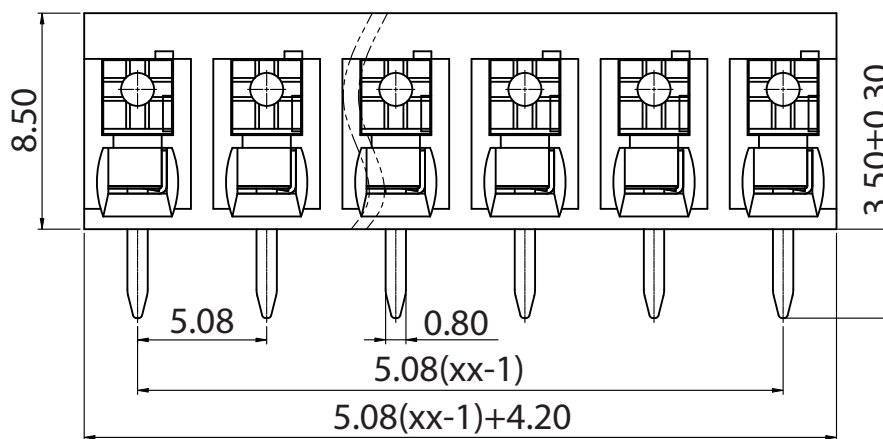

## Approvals

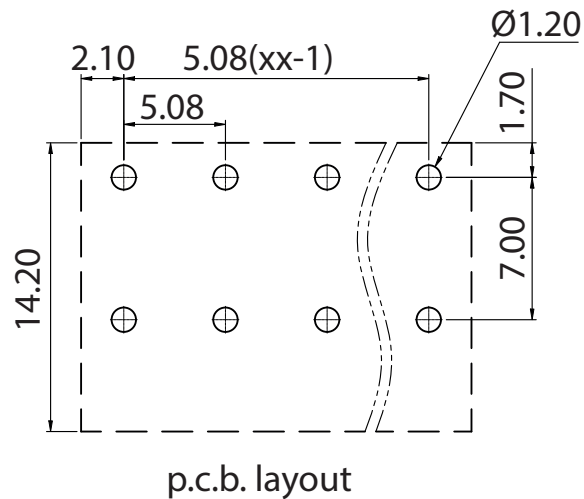

10A - 300V

## Electrical

|                       |                               |
|-----------------------|-------------------------------|
| Rated voltage IEC     | 250 V                         |
| Rated current IEC     | 17.5 A                        |
| Contact resistance    | 20 mΩ                         |
| Insulation resistance | 500 MΩ/DC 500 V               |
| Withstanding voltage  | AC 1600 V/1 min               |
| Wire range            | 1,5 mm <sup>2</sup> 24÷16 AWG |

|                  |                    |
|------------------|--------------------|
| Torque           |                    |
| Temp. Range      | -40°C + 105°C      |
| Stripping length | 8 mm               |
| Max sold. time   | +285°C for 10 sec. |

## Dimensions

|       |         |
|-------|---------|
| Pitch | 5.08 mm |
| Poles | 2÷24    |

## Material

|            |                         |
|------------|-------------------------|
| Housing    | LCP UL94V0              |
| Pin        | Copper Alloy, Sn plated |
| Cage       |                         |
| Screws     |                         |
| Side Block |                         |
| Nut screw  |                         |
| Clamp      | Stainless Steel         |

## General description of ordering code

| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| MRMA1  | 2÷24     | -5.08 | -H      |       | -TH    |

## Version Date

02/26

03/09/26



euro-block



UNITS: mm

SHEET SIZE: ISO A4

SCALE: 3:1

> 0 ~ 3

> 3 ~ 18

> 18 ~ 50


> 50 ~ 120

± 0.12

± 0.15

± 0.3

± 0.5



MRMA1-5.08-H-TH