

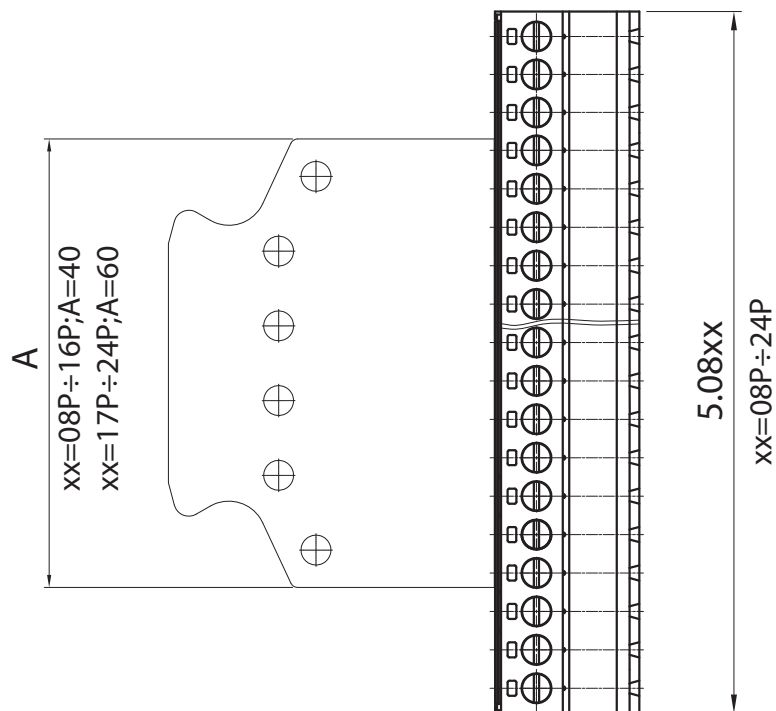



08P÷24P

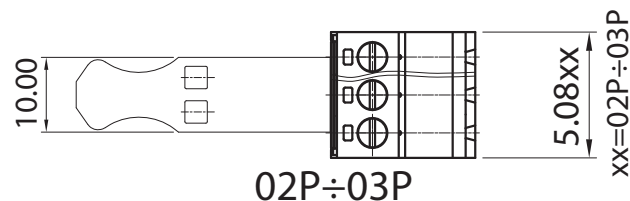

02P÷03P

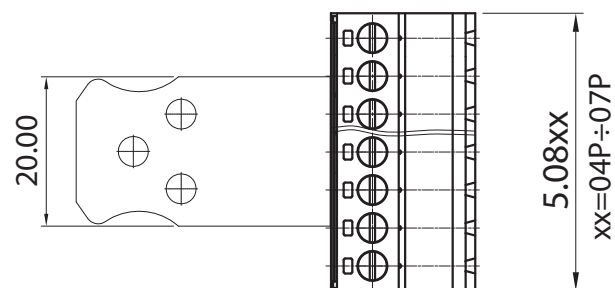

04P÷07P

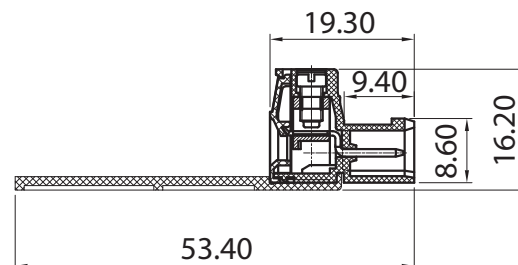

## Approvals



15A-300V

## Electrical

|                       |                              |
|-----------------------|------------------------------|
| Rated voltage IEC     | 450V                         |
| Rated current IEC     | 17,5A                        |
| Contact resistance    | 20mΩ                         |
| Insulation resistance | 500MΩ/DC500V                 |
| Withstanding voltage  | AC2000V/1min                 |
| Wire range            | 28-14 AWG 2,5mm <sup>2</sup> |

|                  |                  |
|------------------|------------------|
| Torque           | 0,5Nm (4.5Lb in) |
| Temp. Range      | -40°C +105°C     |
| Stripping lenght | 7 mm             |
| Max sold. time   |                  |

## Dimensions

|       |         |
|-------|---------|
| Pitch | 5,08 mm |
| Poles | 2÷24    |

## Material

|            |                         |
|------------|-------------------------|
| Housing    | PA66 UL94V0             |
| Pin        |                         |
| Cage       | Copper Alloy, Ni plated |
| Screws     | M3 steel, Zn plated     |
| Side Block |                         |
| Nut screw  |                         |
| Clamp      | Copper Alloy, Ni plated |

## General description of ordering code

| Series | n. Poles | Pitch | Version | Color | Custom |
|--------|----------|-------|---------|-------|--------|
| CRF    | 02÷24    | -5.08 | -L      |       |        |

## Version Date

01/26 05/05/26



euro-block



linear dimension (Tolerances Standard GB/T 14486-2008)

| variable range | to 6  | over 6 to 10 | over 10 to 30 | over 30 to 60 | over 60 to 100 | over 100 to 160 | over 160 to | to 10 | over 10 to 100 | over 100 to |
|----------------|-------|--------------|---------------|---------------|----------------|-----------------|-------------|-------|----------------|-------------|
| tolerance      | ±0.20 | ±0.30        | ±0.50         | ±0.70         | ±1.00          | ±1.30           | ±1.60       | 0.10  | 0.30           | 0.60        |

UNITS: mm

SCALE: 10:1

SHEET SIZE: ISO A4



First angle projection

CRF-5.08-L